




# High-Performance AI Vision Core Board

- | Core-1126-JD4(Commercial)
- | Core-1126K-JD4(Industrial)

V1.2 2024-3-18

T-CHIP INTELLIGENCE TECHNOLOGY

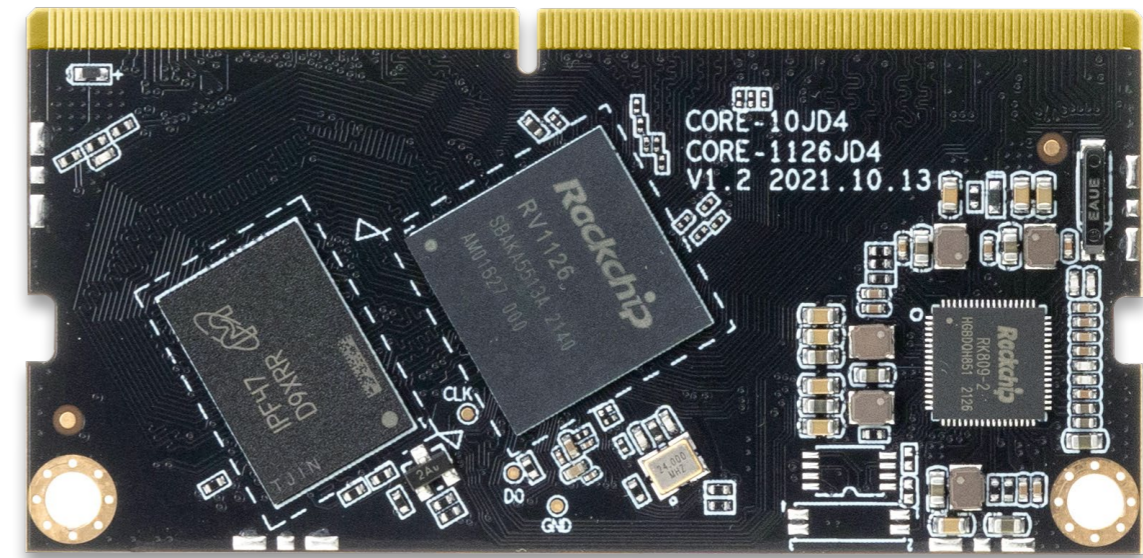

# Product features



## Quad-core AI vision processor

Low-consumption AI vision processor RV1126, with 14nm lithography process and quad-core 32-bit ARM Cortex-A7 architecture, integrates NEON and FPU – the frequency is up to 1.5GHz. It supports FastBoot, TrustZone technology and multiple crypto engines.




## 4K H.265 encoding & decoding

Built-in Video CODEC supports 4K H.254/H.265@30FPS and multi-channel video encoding and decoding, meeting the needs of low bit rate, low-latency encoding, perceptual encoding and making the video occupancy smaller.



## Stable and reliable OS


It supports Buildroot+QT OS – occupies small space, starts fast, and provides stable and reliable operation.



## Various interfaces

SODIMM 260P port is provided; I2C, SPI, UART, ADC, PWM, GPIO, USB2.0, SDIO, I2S, MIPI-DSI, MIPI-CSI, CIF, SDMMC, PHY and other interfaces are equipped, meeting needs of more usage scenarios.

# Product features

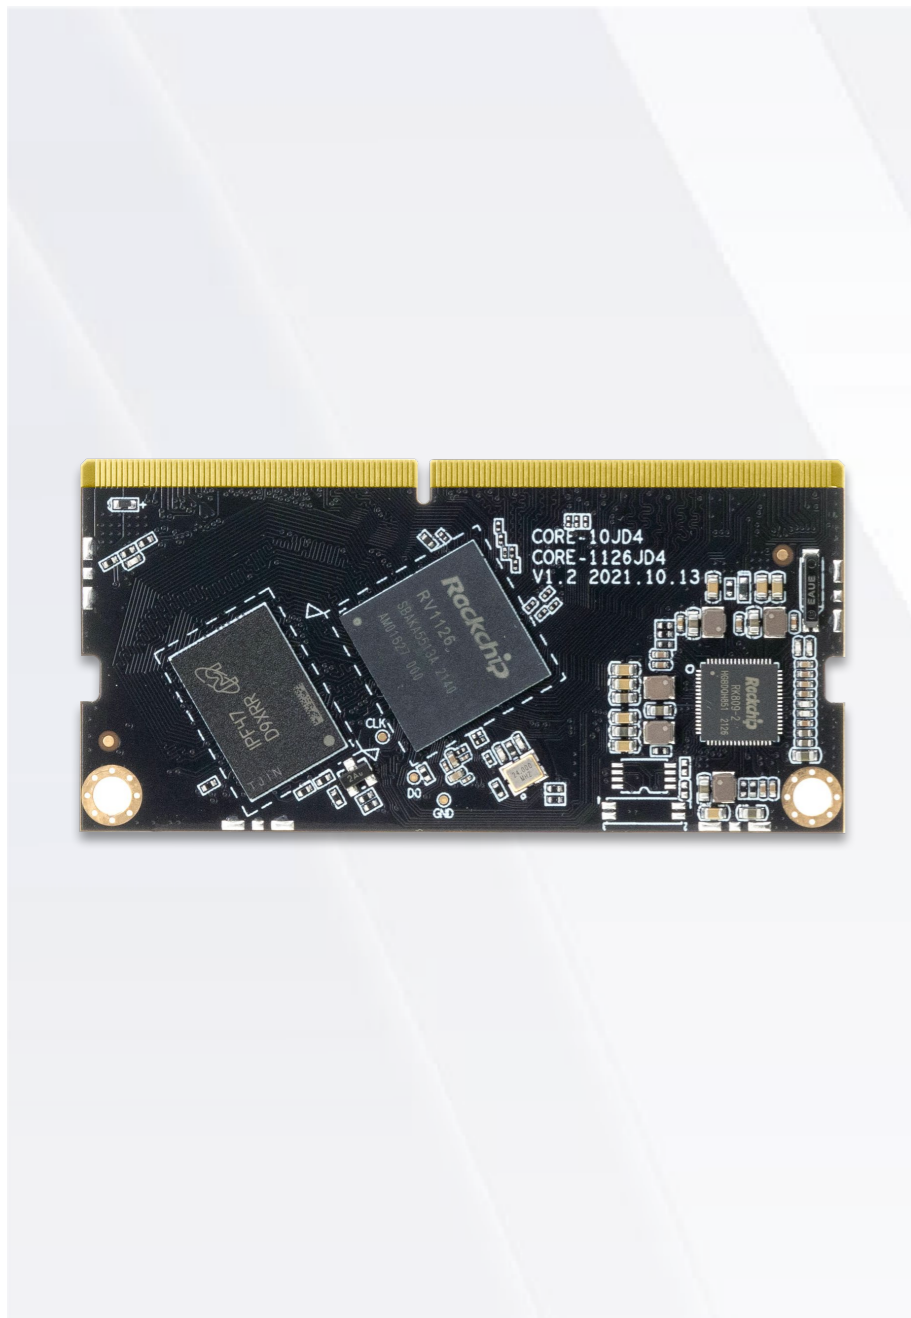

## High performance, high computing power

Built-in neural network processor NPU with computing power up to 2.0 Tops realizes that at the power consumption of AI computing is less than 10% of the power required by the GPU. With tools and supporting AI algorithms provided, it supports direct conversion and deployment of Tensorflow, PyTorch, Caffe, MxNet, DarkNet, ONNX, etc.



## Multi-level image noise reduction

With multi-level image noise reduction, 3F-HDR and other technologies, RV1126 not only ensures the dynamic range of the scene, but also meets the needs of outputting full color in darkness, making "clearly visible" a reality – more conforms to the actual demands in the security field.



## Applications



It is widely used in face recognition, gesture recognition, gate access control, smart security, smart IP camera, smart doorbell/peephole, self-service terminals, smart finance, smart construction, smart travel and other industries.

# Specifications




		Core-1126-JD4 (Commercial)	Core-1126K-JD4 (Industrial)
Basic Specifications	CPU	RV1126 Quad-core 32-bit ARM Cortex-A7, RISC-V MCU, up to 1.5GHz	RV1126K Quad-core 32-bit ARM Cortex-A7, RISC-V MCU, up to 1.5GHz
	NPU	Up to 2.0 TOPs Support 8-bit/16-bit operation Support TensorFlow, TensorFlow lite, Pytorch, Caffe, Mxnet, Darknet, Onnx	
	ISP	14MP ISP, 3-frame HDR	
	VPU	4K H.264/H.265 30fps video encoding, 3840×2160@30fps + 1080@30fps encoding 4K H.264/H.265 30fps video decoding, 3840×2160@30fps encoding + 3840×2160@30fps decoding	
	RAM	LPDDR4 (1GB /2GB/4GB optional)	
	Storage	eMMC (8GB/16GB/32GB optional)	
	Power	Core board supply voltage 5V (voltage tolerance ± 5%)	
	OS	Buildroot+QT	
	Interface	Gold finger (SODIMM 260P standard interface, 0.5mm pitch)	
	Weight	≈ 20g	
	Size	69.9mm * 33.96mm	
	Power consumption	Min:≈0.15W(5.0V/30mA) Normal:≈0.8W(5.0V/160mA) Max:≈3.25W(5.0V/650mA)	Min:≈0.15W(5.0V/30mA) Normal:≈0.75W(5.0V/150mA) Max:≈3.25W(5.0V/650mA)
	Environment	Operating temperature: -20°C ~ 60°C Storage humidity: 10% ~ 90%RH (non-condensing)	Operating temperature: -20°C ~ 70°C Storage humidity: 10% ~ 90%RH (non-condensing)
Interface Specifications	Network	Through the SDIO3.0, WiFi6/Bluetooth expansion is available; 4G/3G network expansion is supported Through GMAC, Gigabit Ethernet expansion is available and TSO (TCP Segmentation Offload) for network acceleration is supported	
	Video Input	2 * MIPI CSI (or LVDS/sub LVDS) 1 * DVP (BT.601/BT.656/BT.1120) Support simultaneous input from 3 cameras: 2 * MIPI CSI (or LVDS/sub LVDS) + 1 * DVP	
	Video Output	1 * MIPI-DSI (up to 1080P @ 60 FPS)	
	Audio	1 * I2S/PCM/TDM (8 channels), supporting microphone array 2 * I2S/PCM (2 channels)	
	USB	1 * USB 2.0 HOST, 1 * USB 2.0 OTG	
	Other	2 * SPI, 6 * UART, 6 * I2C, 1 * CAN, 4 * PWM, GPIOs	

# Core Board Interface description


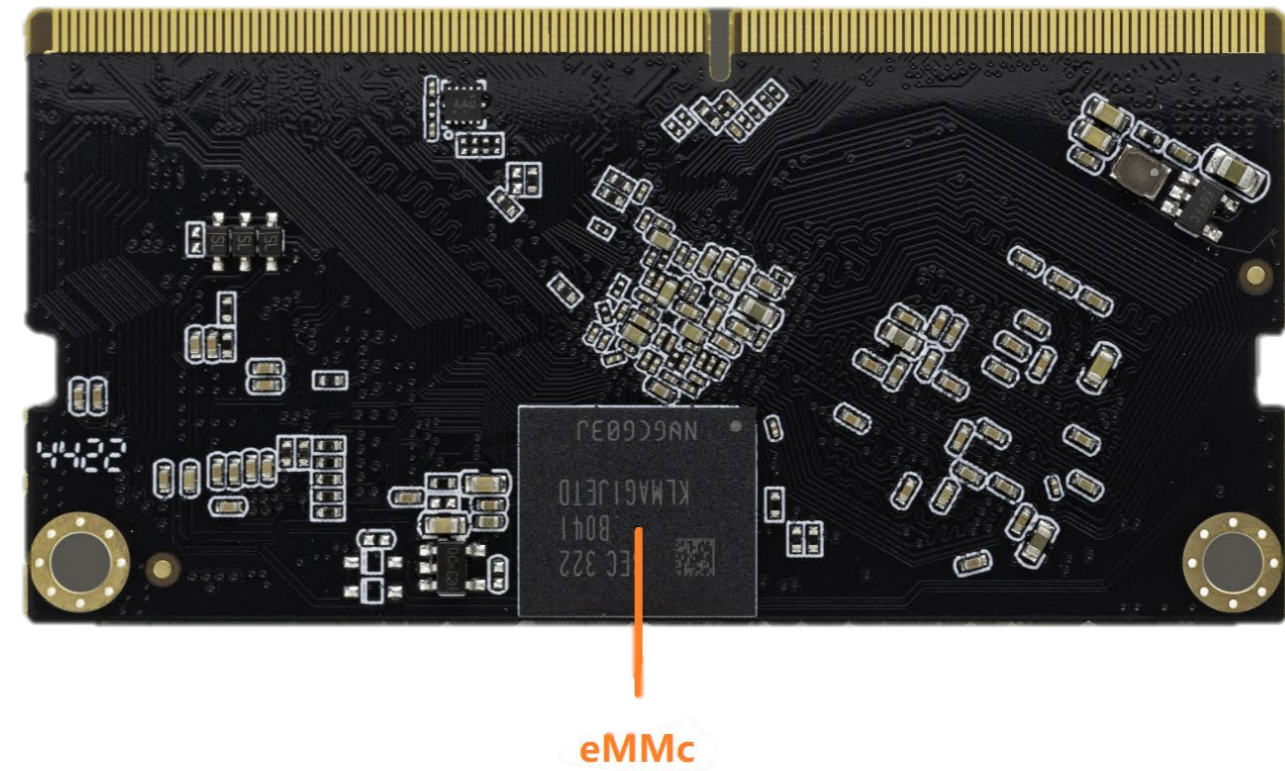
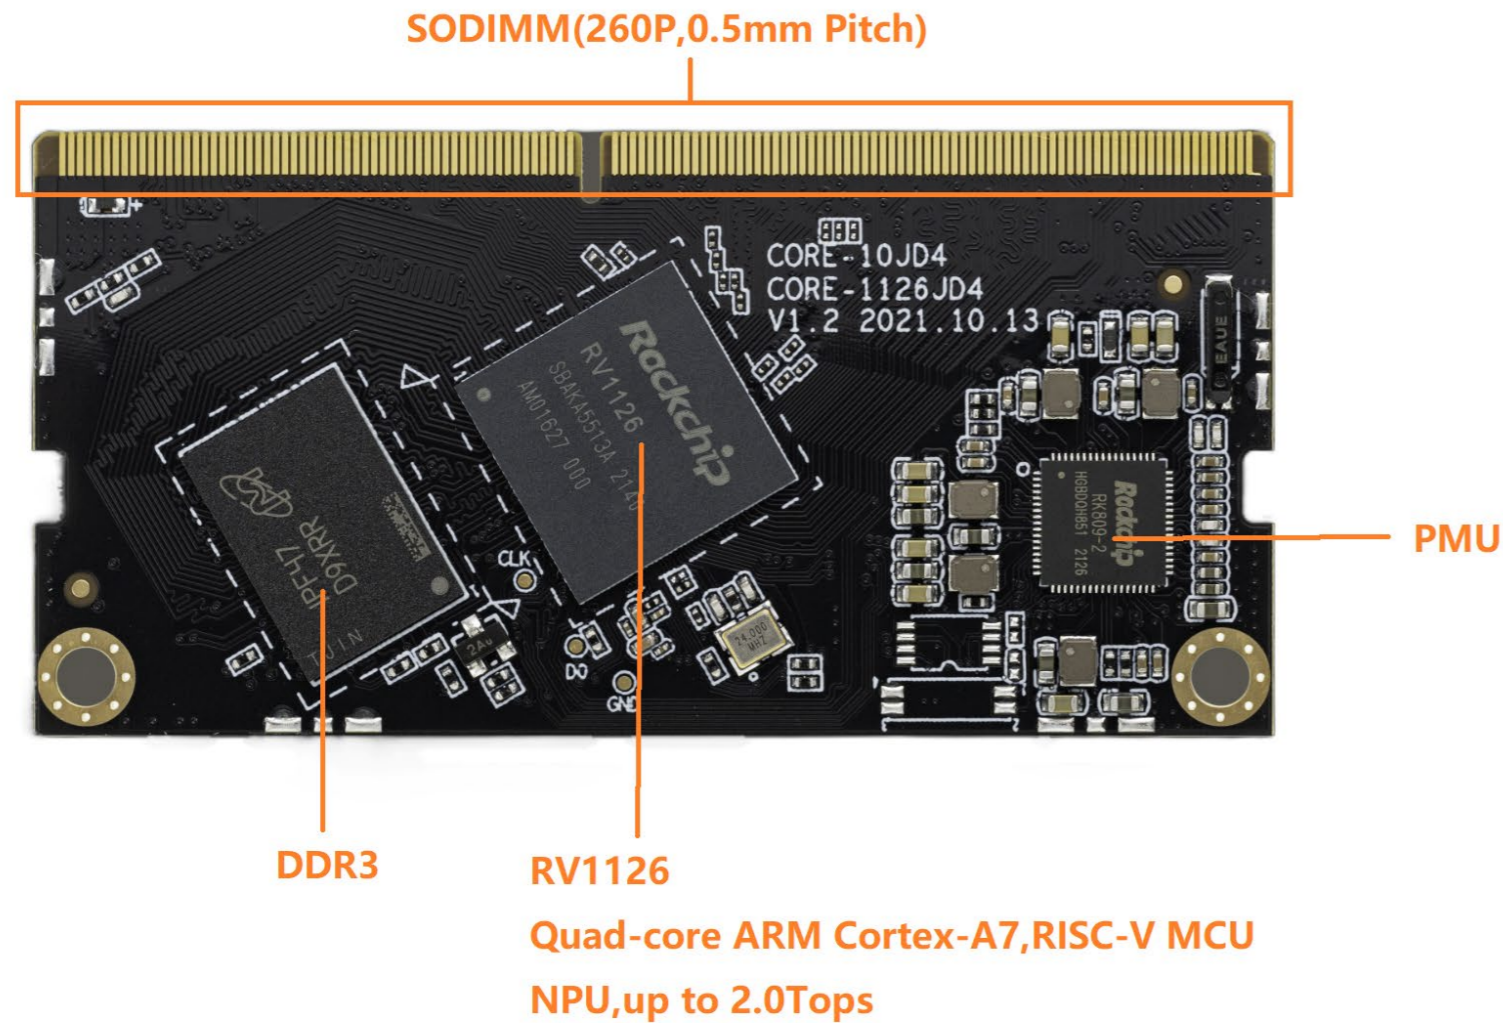


# Core Board Dimension

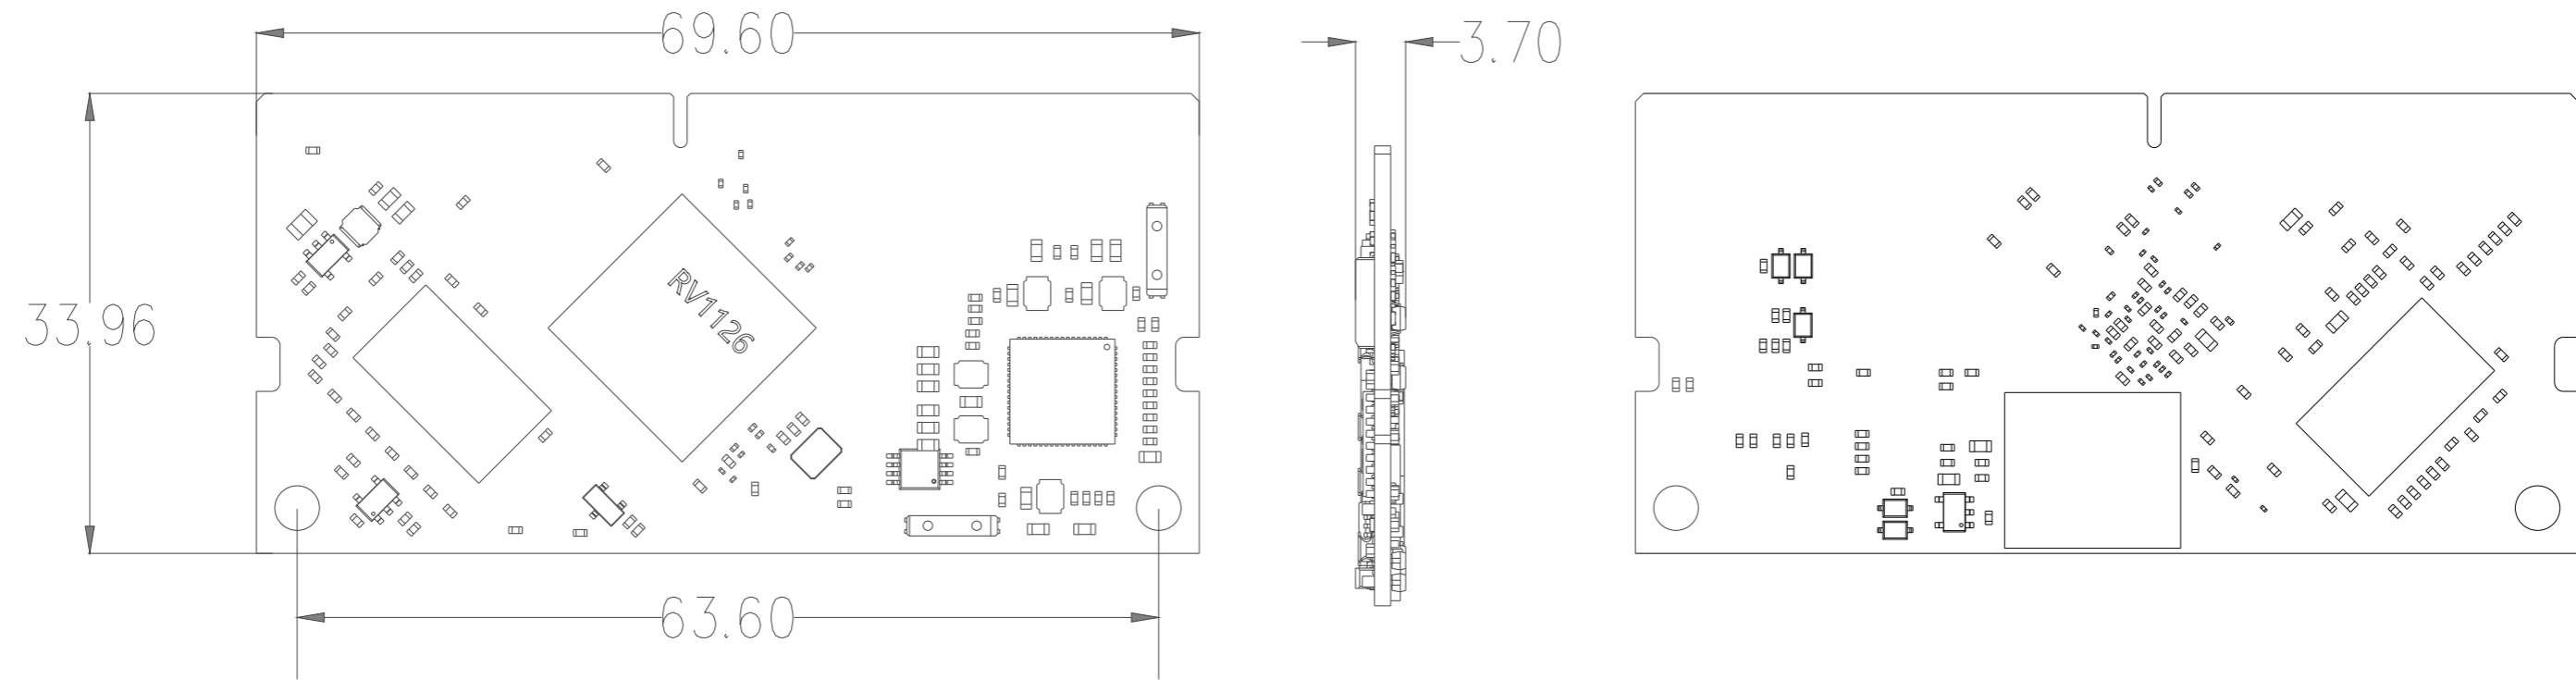




# Mainboard Interface description

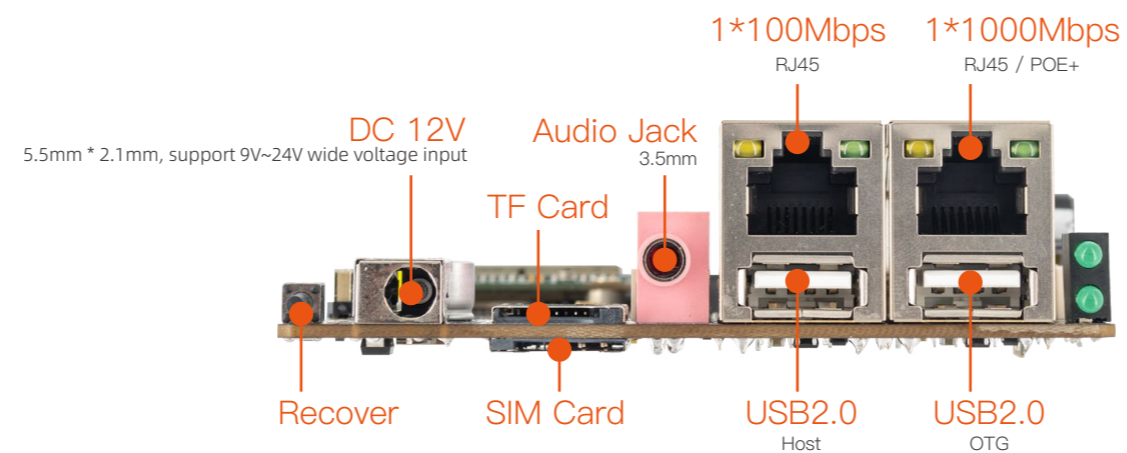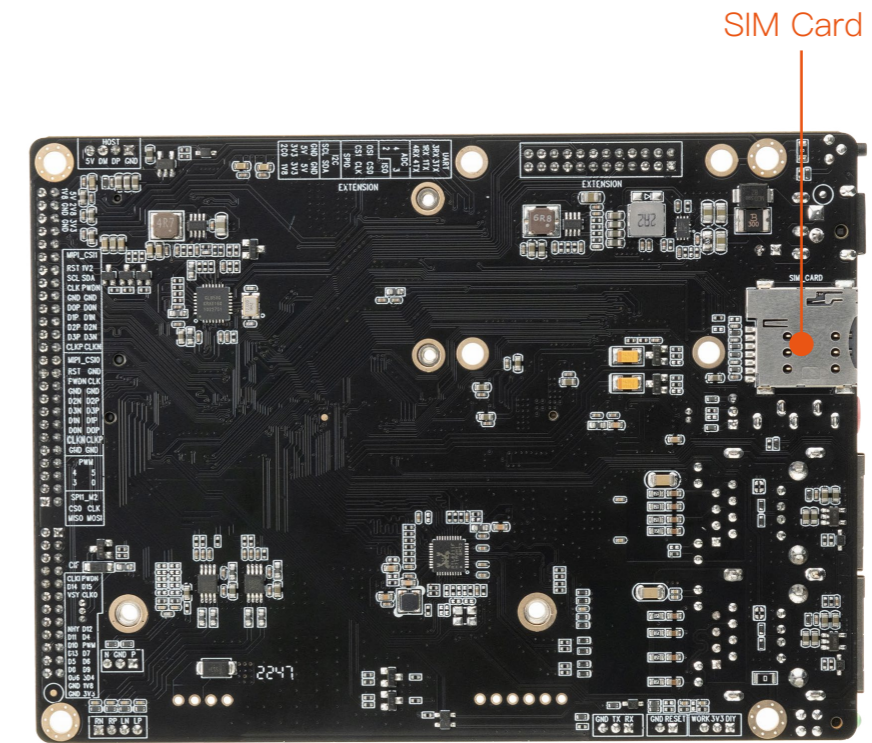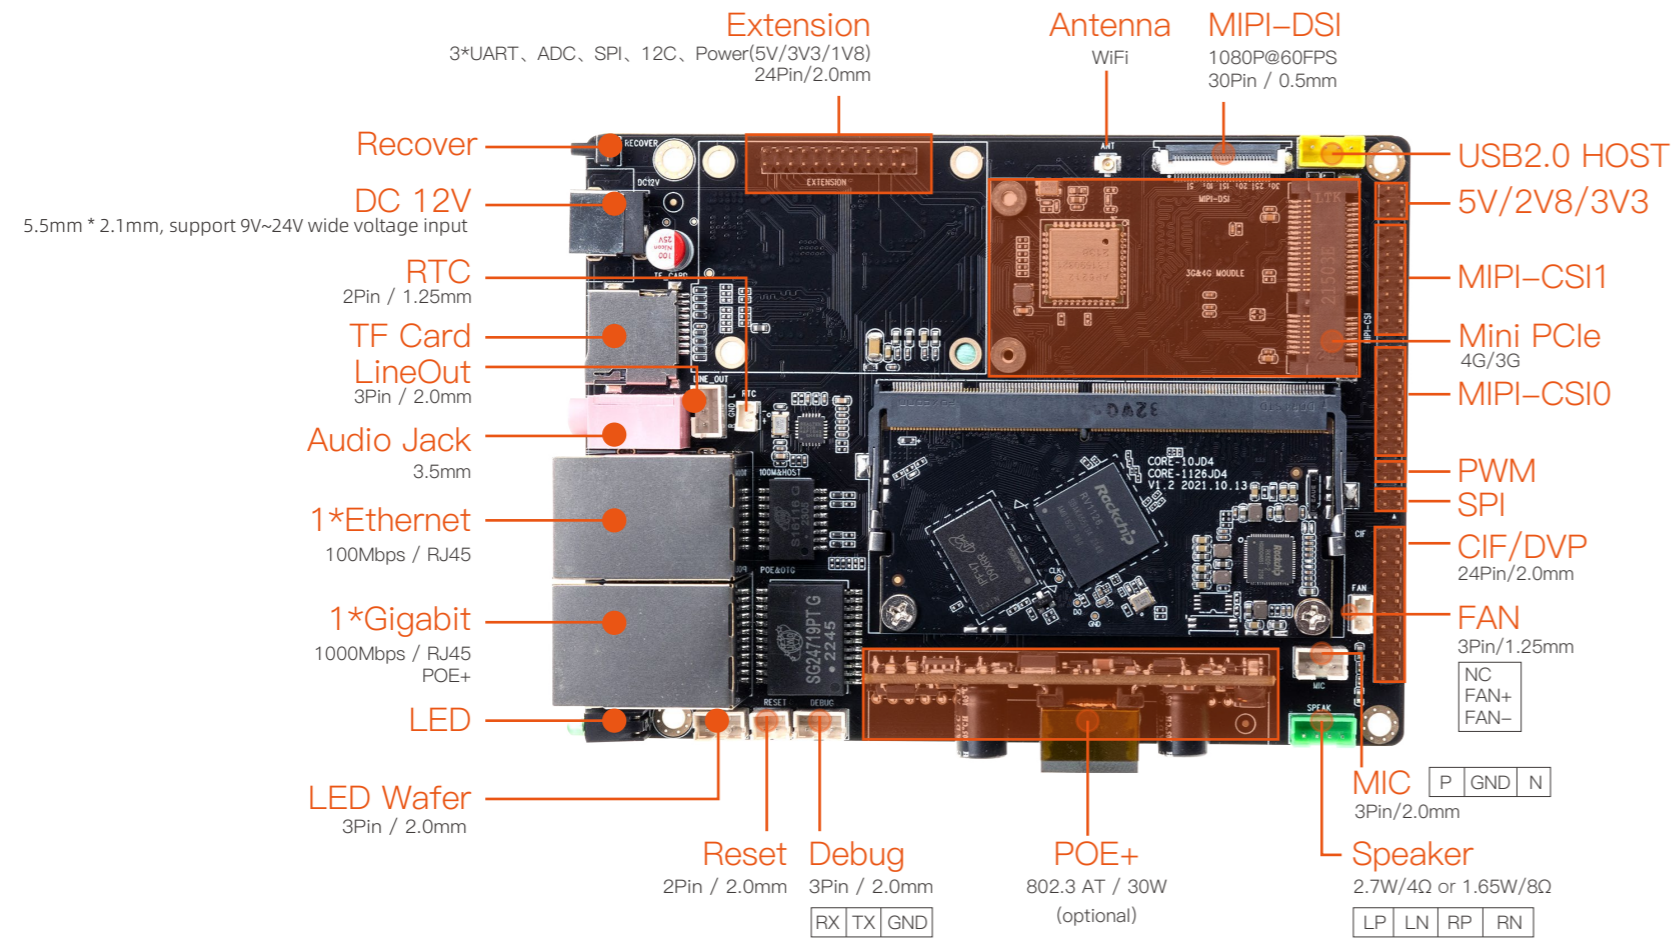

# Mainboard Dimension

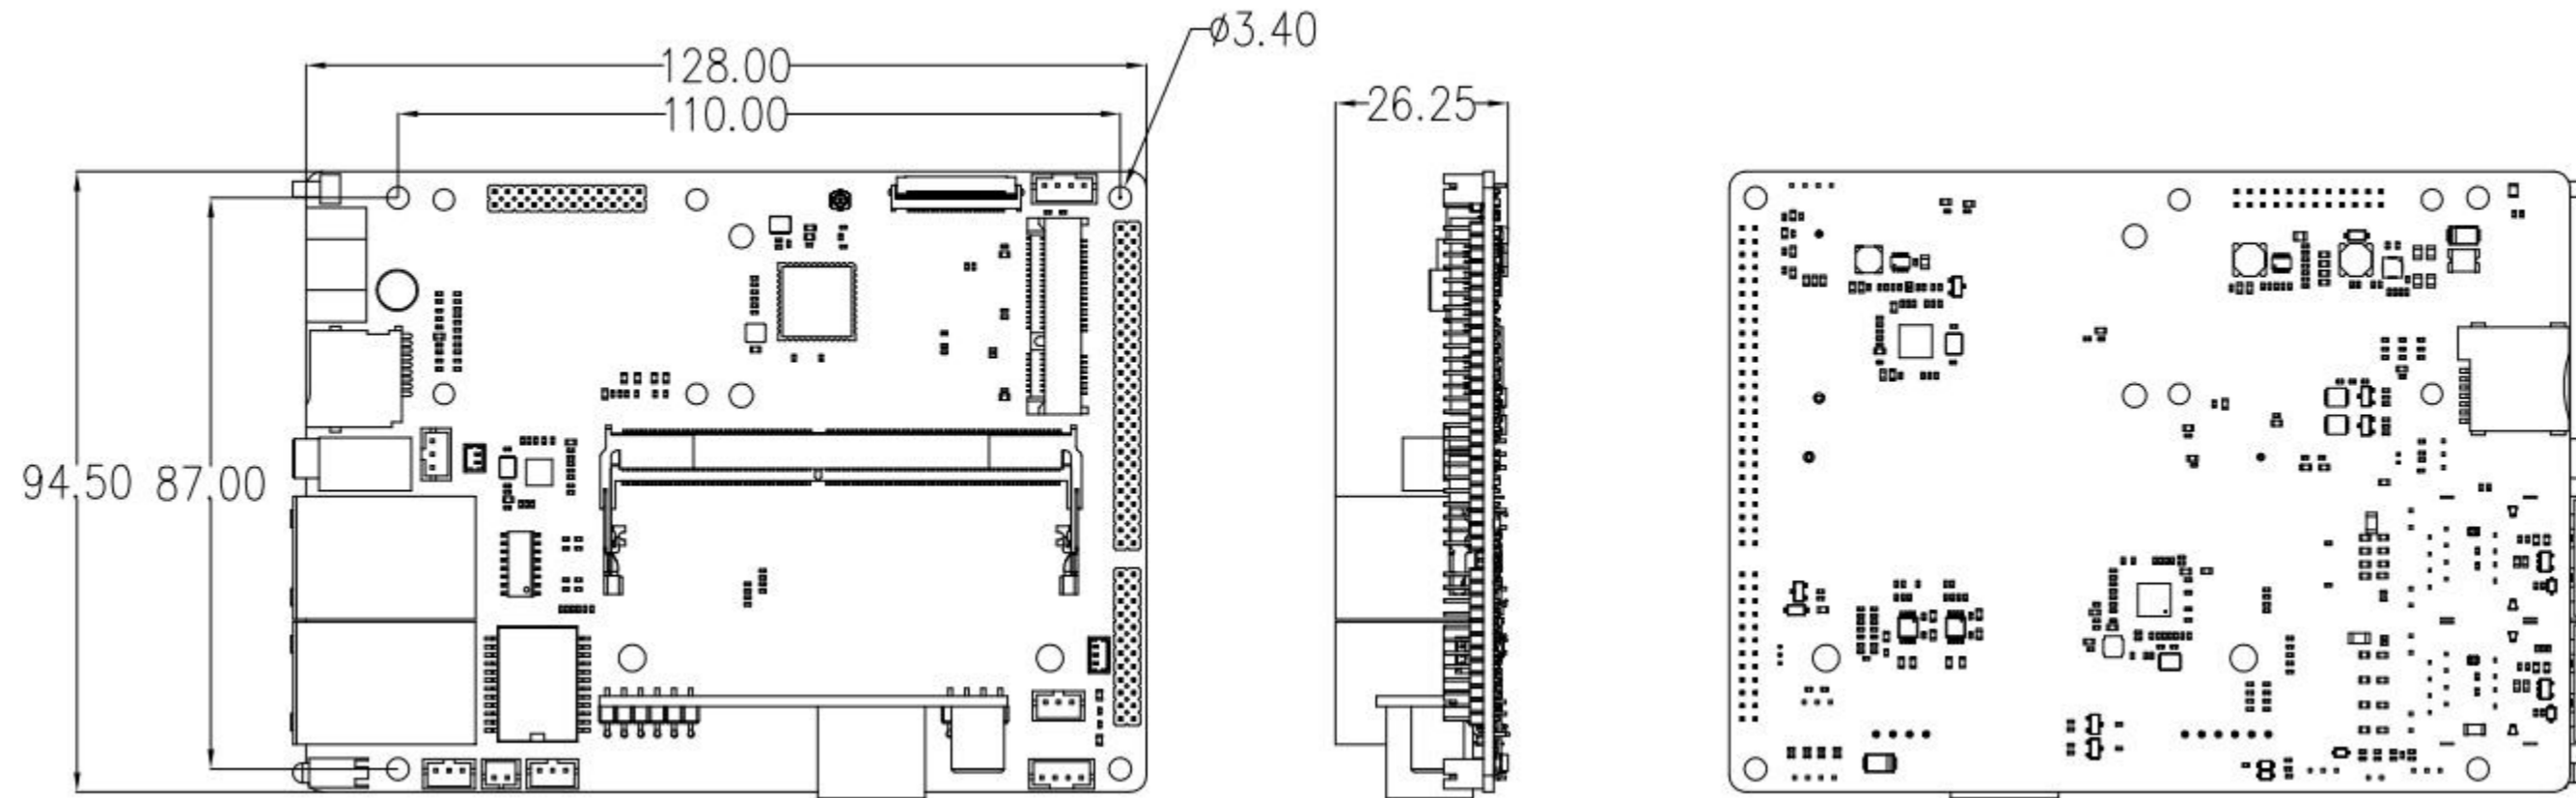





# Interface definition

**Notes1:**

Pin type: I = input, O = output, I/O = input/output (bidirectional) ,G= Ground , P = power supply , DOWN = Internal pull down , UP = Internal pull UP

Part A	pin	Core board pin definition	Pin type	I/O Pull	Function for Floor(MB-JD4-RV11091126)	Default function description	IO Power domain	RV1126 Pin Number	RV1126 Pin Name
	1	GND_1	G		GND_1	GND			GND_1
	3	GPIO0_A4_U	I/O	UP	WORKLED	System LED control 1:Enable,0:Disable	1.8V	V7	SPI0_CS1N_M0 / GPIO0_A4_U
	5	GPIO0_C0_D	I/O	DOWN	DIYLED	Diy led control 1:Enable,0:Disable	3.3V	U9	SDMMC0_PWR / UART1_RTSM_M0 / PWM2_M0 / GPIO0_C0_D
	7	GPIO0_A2_Z	I/O		FAN_CTRL		1.8V	AA3	CLKI_CLKO_32K / GPIO0_A2_Z
	9	GND_2	G		GND_2				GND_2
	11	MIC1_INN	I		MIC1_INN	PMIC MIC_IN_N Core board internal series capacitor 0.1uF	3.3V		MIC1_N / MIC_R
	13	MIC1_INP	I		MIC1_INP	PMIC MIC_IN_P, Core board internal series capacitor 0.1uF	3.3V		MIC1_P / MIC_L
	15	HPR_OUT	O		HPR_OUT	PMIC_HearPhone_OUT_R	3.3V		HPR_OUT
	17	HP_SNS			HP_SNS	PMIC_HearPhone_OUT_GND			HP_SNS
	19	HPL_OUT	O		HPL_OUT	PMIC_HearPhone_OUT_L	3.3V		HPL_OUT
	21	SPKN_OUT	O		SPKN_OUT	PMIC_Sperker_OUT_N	3.3V		SPKN_OUT
	23	SPKP_OUT	O		SPKP_OUT	PMIC_Sperker_OUT_P	3.3V		SPKP_OUT
	25	GND	G		GND				GND_3
	27	USB_HOST_DP	I/O		USB_HOST_DP		3.3V	Y1	USB_HOST_DP
	29	USB_HOST_DM	I/O		USB_HOST_DM		3.3V	Y2	USB_HOST_DM



31	GND_4	G		GND				GND_4
33	NC			NC				NC_1
35	NC			NC				NC_2
37	GND_5	G		GND				GND_5
39	I2C2_SCL	I/O	DOWN	PWM4_M0	PWM4_M0	3.3V	AA6	I2C2_SCL / PWM4_M0 / GPIO0_C2_D
41	I2C2_SDA	I/O	DOWN	PWM5_M0	PWM5_M0	3.3V	Y6	I2C2_SDA / PWM5_M0 / GPIO0_C3_D
43	GND_4	G		GND	GND			GND_6
45	MIPI_CSI_RX0_D2P	I		MIPI_CSI_RX0_D2P	MIPI_CSI_RX0_D2P	1.8V	W15	MIPI_CSI_RX0_D2P / LVDS0_RX2P
47	MIPI_CSI_RX0_D2N	I		MIPI_CSI_RX0_D2N	MIPI_CSI_RX0_D2N	1.8V	Y15	MIPI_CSI_RX0_D2N / LVDS0_RX2N
49	MIPI_CSI_RX0_D3P	I		MIPI_CSI_RX0_D3P	MIPI_CSI_RX0_D3P	1.8V	AA15	MIPI_CSI_RX0_D3P / LVDS0_RX3P
51	MIPI_CSI_RX0_D3N	I		MIPI_CSI_RX0_D3N	MIPI_CSI_RX0_D3N	1.8V	AA16	MIPI_CSI_RX0_D3N / LVDS0_RX3N
53	MIPI_CSI_RX0_D1P	I		MIPI_CSI_RX0_D1P	MIPI_CSI_RX0_D1P	1.8V	Y16	MIPI_CSI_RX0_D1P / LVDS0_RX1P
55	MIPI_CSI_RX0_D1N	I		MIPI_CSI_RX0_D1N	MIPI_CSI_RX0_D1N	1.8V	W16	MIPI_CSI_RX0_D1N / LVDS0_RX1N
57	MIPI_CSI_RX1_D3P	I		MIPI_CSI_RX1_D3P	MIPI_CSI_RX1_D3P	1.8V	Y17	MIPI_CSI_RX1_D3P / LVDS1_RX3P
59	MIPI_CSI_RX1_D3N	I		MIPI_CSI_RX1_D3N	MIPI_CSI_RX1_D3N	1.8V	W17	MIPI_CSI_RX1_D3N / LVDS1_RX3N
61	MIPI_CSI_RX1_D2P	I		MIPI_CSI_RX1_D2P	MIPI_CSI_RX1_D2P	1.8V	AA18	MIPI_CSI_RX1_D2P / LVDS1_RX2P
63	MIPI_CSI_RX1_D2N	I		MIPI_CSI_RX1_D2N	MIPI_CSI_RX1_D2N	1.8V	Y18	MIPI_CSI_RX1_D2N / LVDS1_RX2N
65	GND_7	G		GND	GND			GND_7
67	MIPI_CSI_RX1_D1P	I		MIPI_CSI_RX1_D1P	MIPI_CSI_RX1_D1P	1.8V	AA19	MIPI_CSI_RX1_D1P / LVDS1_RX1P
69	MIPI_CSI_RX1_D1N	I		MIPI_CSI_RX1_D1N	MIPI_CSI_RX1_D1N	1.8V	Y19	MIPI_CSI_RX1_D1P / LVDS1_RX1N



71	MIPI_CSI_RX1_D0P	I		MIPI_CSI_RX1_D0P	MIPI_CSI_RX1_D0P	1.8V	AA20	MIPI_CSI_RX1_D0P / LVDS1_RX0P
73	MIPI_CSI_RX1_D0N	I		MIPI_CSI_RX1_D0N	MIPI_CSI_RX1_D0N	1.8V	Y20	MIPI_CSI_RX1_D0P / LVDS1_RX0N
75	GND8	G		GND	GND			GND8
77	MIPI_CSI_PWDN0	I/O	UP	MIPI_CSI_PWDN0	MIPI-CSI Power_EN	1.8V	W20	UART4_RX_M2 / GPIO1_D4_d
79	MIPI_CSI_CLK1	I/O	DOWN	MIPI_CSI_CLK1	MIPI-CSI_clock1	1.8V	W21	MIPI_CSI_CLK1 / UART5_RTSN_M2 / GPIO2_A2_D
81	MIPI_CSI_CLK0	I/O	DOWN	MIPI_CSI_CLK0	MIPI-CSI_clock0	1.8V	V21	MIPI_CSI_CLK0 / UART5_CTSN_M2 / GPIO2_A3_D
83	GND_9	G		GND	GND			GND_9
85	SPI0_CS1N_M1	I/O	DOWN	SPI0_CS1N_M1	SPI0_CS1N_M1	1.8V	V20	SPI0_CS1N_M1 / I2S1_MCLK_M1 / UART4_TX_M2 / GPIO1_D5_D
87	SPI0_MOSI_M1/I2C3_SCL_M2	I/O	DOWN	SPI0_MOSI_M1	SPI0_MOSI_M1	1.8V	V19	SPI0_MOSI_M1 / I2S1_SCL_M1 / I2C3_SCL_M2 / GPIO1_D6_D
89	SPI0_CLK_M1	I/O	DOWN	SPI0_CLK_M1	SPI0_CLK_M1	1.8V	U20	SPI0_CLK_M1 / I2S1_SDO_M1 / UART5_RX_M2 / GPIO2_A1_D
91	SPI0_CS0N_M1	I/O	DOWN	SPI0_CS0N_M1	SPI0_CS0N_M1	1.8V	U19	SPI0_CS0N_M1 / I2S1_SDI_M1 / UART5_TX_M2 / GPIO2_A0_D
93	SPI0_MISO_M1/I2C3_SDA_M2	I/O	DOWN	SPI0_MISO_M1	SPI0_MISO_M1	1.8V	U18	SPI0_MISO_M1 / I2S1_LRCK_M1 / I2C3_SDA_M2 / GPIO1_D7_D
95	UART4_TX_M1 /GPIO2_A6_D	I/O	DOWN	UART4_TX	UART4_TX	3.3V	M21	UART4_TX_M1 / PWM5_M1 / RGMII_COL_M1 / CIF_D2_M1 / LCDC_D2 / GPIO2_A6_D
97	GND_10	G		GND	GND			GND_10
99	RMII_RXDV	I/O	DOWN	RMII_RXDV	RMII_RXDV	3.3V	K18	RGMII_RXDV_M1 / CIF_D4_M1 / LCDC_D8 / GPIO2_B4_D
101	RMII_RXD0	I/O	DOWN	RMII_RXD0	RMII_RXD0	3.3V	K19	RGMII_RXD0_M1 / CIF_D5_M1 / LCDC_D9 / GPIO2_B5_D



103	RMII_CLK	I/O	DOWN	RMII_CLK	RMII_CLOCK	3.3V	K21	RGMII_CLK_M1 / CIF_D7_M1 / LCDC_D11 / GPIO2_B7_D
105	RMII_RXD1	I/O	DOWN	RMII_RXD1	RMII_RXD1	3.3V	K20	RGMII_RXD1_M1 / CIF_D6_M1 / LCDC_D10 / GPIO2_B6_D
107	RMII_MDIO	I/O	DOWN	RMII_MDIO	RMII_MDIO	3.3V	J21	RGMII_MDIO_M1 / CIF_D9_M1 / LCDC_D13 / GPIO2_C1_D
109	RMII_MDC	I/O	DOWN	RMII_MDC	RMII_MDC	3.3V	J20	RGMII_MDC_M1 / CIF_D10_M1 / LCDC_D14 / GPIO2_C2_D
111	RMII_RXER	I/O	DOWN	RMII_RXER	RMII_RXER	3.3V	J19	RGMII_RXER_M1 / CIF_D8_M1 / LCDC_D12 / GPIO2_C0_D
113	RMII_TXD0	I/O	DOWN	RMII_TXD0	RMII_TXD0 Core board internal series resistance 22R	3.3V	H20	RGMII_TXD0_M1 / CIF_D11_M1 / LCDC_D15 / GPIO2_C3_D
115	GND_11	G		GND	GND			GND_11
117	RMII_TXD1	I/O	DOWN	RMII_TXD1	RMII_TXD1 Core board internal series resistance 22R	3.3V	H19	RGMII_TXD1_M1 / CIF_D12_M1 / LCDC_D16 / GPIO2_C4_D
119	CLKOUT/GPIO_C5_D	I/O	DOWN	CLKOUT/GPIO_C5_D	PHY_XTALOUT	3.3V	G21	CLK_OUT_ETHERNET_M1 / CIF_D13_M1 / LCDC_D17 / GPIO2_C5_D
121	RMII_RXD3/HOST_DRV_H	I/O	DOWN	RMII_RXD3	RMII_RXD3	3.3V	H18	I2S1_SDO_M2 / RGMII_RXD3_M1 / CIF_VSYNC_M1 / LCDC_D20 / GPIO2_D0_D
123	GND_12	G		GND	GND			GND_12
125	RMII_TXEN/GPIO2_C6_D	I/O	DOWN	RMII_TXEN	RMII_TXEN	3.3V	G20	RGMII_TXEN_M1 / CIF_D14_M1 / LCDC_D18 / GPIO2_C6_D
127	RMII_TXD2/ZOOM_EN_H	I/O	DOWN	RMII_TXD2	RMII_TXD2 Core board internal series resistance 22R	3.3V	F21	I2S1_SCLK_M2 / RGMII_TXD2_M1 / CIF_CLKOUT_M1 / LCDC_D21 / GPIO2_D1_D
129	RMII_TXCLK/FOCUS_EN_H	I/O	DOWN	RMII_TXCLK	RMII_TXCLK Core board internal series resistance 22R	3.3V	F20	I2S1_LRCK_M2 / RGMII_TXCLK_M1 / CIF_CLKIN_M1 / LCDC_D22 / GPIO2_D2_D



131	NC			NC	NC			NC_3
133	OTG_DP			OTG_DP	USB_OTG_DP	3.3V	W3	OTG_DP
135	OTG_DM			OTG_DM	USB_OTG_DM	3.3V	W4	OTG_DM
137	NC			NC	NC			NC_4
139	LCD_PWREN/UART3_TX_M2	I/O	UP	UART3_TX	UART3_TX_M2	3.3V	E20	I2C4_SCL_M0 / CAN_RXD_M0 / UART3_TX_M2 / PWM7_IR_M1 / SPI1_CS1N_M2 / GPIO3_A0_U
141	GPIO3_A1_U/UART3_RX_M2	I/O	UP	UART3_RX	UART3_RX_M2	3.3V	E19	I2C4_SDA_M0 / CAN_TXD_M0 / UART3_RX_M2 / PWM11_IR_M1 / GPIO3_A1_U
143	PWM8_M1	I/O	DOWN	PWM8_M1/SPI1_MISO_M2	PWM8_M1/SPI1_MISO_M2	3.3V	D21	UART3_CTSN_M2 / PWM8_M1 / SPI1_MISO_M2 / LCDC_CLK / GPIO2_D7_D
145	OTG_VBUS_DET	I	DOWN	OTG_DET_1V8	OTG_DET.Active Hight	1.8V	V5	OTG_VBUS1V8
147	MIPI_DSI_TX0_D3P	O		MIPI_DSI_TX0_D3P	MIPI_DSI_TX0_D3P	1.8V	D20	MIPI_DSI_TX0_D3P
149	MIPI_DSI_TX0_D3N	O		MIPI_DSI_TX0_D3N	MIPI_DSI_TX0_D3N	1.8V	D19	MIPI_DSI_TX0_D3N
151	MIPI_DSI_TX0_D2P	O		MIPI_DSI_TX0_D2P	MIPI_DSI_TX0_D2P	1.8V	B21	MIPI_DSI_TX0_D2P
153	MIPI_DSI_TX0_D2N	O		MIPI_DSI_TX0_D2N	MIPI_DSI_TX0_D2N	1.8V	C20	MIPI_DSI_TX0_D2N
155	MIPI_DSI_TX0_D1N	O		MIPI_DSI_TX0_D1N	MIPI_DSI_TX0_D1N	1.8V	B20	MIPI_DSI_TX0_D1N
157	MIPI_DSI_TX0_D1P	O		MIPI_DSI_TX0_D1P	MIPI_DSI_TX0_D1P	1.8V	A20	MIPI_DSI_TX0_D1P
159	MIPI_DSI_TX0_D0N	O		MIPI_DSI_TX0_D0N	MIPI_DSI_TX0_D0N	1.8V	B19	MIPI_DSI_TX0_D0N
161	MIPI_DSI_TX0_D0P	O		MIPI_DSI_TX0_D0P	MIPI_DSI_TX0_D0P	1.8V	A19	MIPI_DSI_TX0_D0P
163	GND_13	G		GND	GND			GND_13



165	SDIO_CLK	I/O	DOWN	SDIO_CLK	SDIO_CLK Core board internal series resistance 22R	1.8V	D16	SDMMC1_CLK / GPIO1_B2_D
167	SDIO_D1	I/O	UP	SDIO_D1	SDIO_D1	1.8V	C16	SDMMC1_D1 / GPIO1_B5_U
169	SDIO_D0	I/O	UP	SDIO_D0	SDIO_D0	1.8V	B16	SDMMC1_D0 / GPIO1_B4_U
171	SDIO_CMD	I/O	UP	SDIO_CMD	SDIO_CMD	1.8V	A16	SDMMC1_CMD / GPIO1_B3_U
173	SDIO_D2	I/O	UP	SDIO_D2	SDIO_D2	1.8V	D15	SDMMC1_D2 / GPIO1_B6_U
175	SDIO_D3	I/O	UP	SDIO_D3	SDIO_D3	1.8V	C15	SDMMC1_D3 / GPIO1_B7_U
177	BT_WAKE	I/O	DOWN	BT_WAKE_L	CPU wake AP6236_BT	1.8V	A13	SDMMC1_PWR / I2C5_SDA_M2 / UART1_RX_M1 / GPIO1_D1_D
179	WIFI_WAKE_HOST	I/O	DOWN	WIFI_WAKE_HOST_L	WIFI_WAKE_HOST_L	1.8V	Y4	SPI0_CLK_M0 / GPIO0_B0_D
181	BT_WAKE_HOST	I/O	UP	BT_WAKE_HOST_L	BT_WAKE_HOST_L	1.8V	AA2	SPI0_CS0N_M0 / GPIO0_A5_U
183	CLK_32K	O		CLK_32K	PMIC_CLK_32K_OUT Core board internal series resistance 22R	1.8V		CLK_32K_OUT
185	GND_14	G		GND	GND			GND_14
187	BT_RST	I/O	DOWN	BT_RST	BT_RST,Active low	1.8V	W5	SPI0_MISO_M0 / GPIO0_A7_D
189	WIFI_REG_ON	I/O	DOWN	WIFI_REG_ON_H	WIFI_EN,Active hight	1.8V	V6	SPI0_MOSI_M0 / GPIO0_A6_D
191	GND_15	G		GND	GND			GND_15
193	NC			NC	NC			NC_6
195	CLK_25M_ETHERNET_M0	I/O	DOWN	CIF_CLKIN_M0	CIF_CLKIN_M0	3.3V	M19	CIF_CLKIN_M0 / CLK_OUT_ETHERNET_M0 / UART3_CTSN_M0 / GPIO3_C5_D
197	GND_16	G		GND	GND			GND_16
199	CIF_PWDN	I/O	DOWN	CIF_PWDN	CIF_PWDN	3.3V	R17	CIF_D0_M0 / I2S0_SCLK_TX_M1 / UART4_TX_M0 / I2C3_SCL_M0 /



								PWM8_M0 / GPIO3_A4_D
201	CIF_D14_M0	I/O	DOWN	CIF_D14	CIF_D14	3.3V	M18	CIF_D14_M0 / RGMII_RXER_M0 / PDM_SDI1_M1 / GPIO3_C2_D
203	NC			NC	NC			NC_7
205	NC			NC	NC			NC_8
207	NC			NC	NC			NC_9
209	NC			NC	NC			NC_10
211	NC			NC	NC			NC_11
213	NC			NC	NC			NC_12
215	NC			NC	NC			NC_13
217	CIF_RST	I/O	DOWN	RESET_HUB	USB_HUB_Reset,Active Hight	1.8V	B13	I2S2_MCLK_M0 / SPI1_CS1n_M1 / SDMMC1_DET / I2C5_SCL_M2 / UART1_TX_M1 /GPIO1_D0_d
219	GND_16	G		GND	GND			
221	POWER_ON			POWER_ON	PMIC Power on Signal Input, External connection Power key , active low	5V		
223	PMIC_VDC	P		VCC_5V_S	Input Voltage 3.3V-5.5V, Rated input current 50mA, PMIC Power_EN, active hight	5V		
225	VCC_1V8	P		VCC_1V8	1.8V output,VCC_1V8 Total Max current 200mA (Pin224/225 same net)	1.8V		
227	VCC3V3_SD	P		VCC3V3_SD	3.3V output for TF card,VCC3V3_SD Total Max current 200mA (Pin226/227 same net)	3.3V		
229	VCC1V2_DVDD	P		VCC1V2_DVDD	1.2V output,VCC1V2_DVDD Total Max current 300mA (Pin228/229 same net)	1.2V		
231	VCC_3V3	P		VCC_3V3	3.3V output,VCC_3V3 Total Max current	3.3V		



					400mA (Pin230/231/234/235 same net)				
233	VCC_5V_S	P		VCC_5V_S	5.0V input for RTC, Max current 50mA	5.0V			
235	VCC_3V3	P		VCC_3V3	3.3V output,VCC_3V3 Total Max current 400mA (Pin230/231/234/235 same net)	3.3V			
237	VCC2V8_AVDD	P		VCC2V8_AVDD	2.8V output,VCC2V8_AVDD Total Max current 300mA (Pin236/237 same net)	2.8V			
239	VCC1V8_DOVDD	P		VCC1V8_DOVDD	1.8V output,VCC1V8_DOVDD Total Max current 300mA (Pin238/239/ same net)	1.8V			
241	NC_15								
243	GND_17	G		GND	Power ground				
245	GND_18	G		GND	Power ground				
247	GND_19	G		GND	Power ground				
249	GND_20	G		GND	Power ground				
251	VCC5V0_SYS_1	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN			
253	VCC5V0_SYS_2	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN			
255	VCC5V0_SYS_3	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN			
257	VCC5V0_SYS_4	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN			
259	VCC5V0_SYS_5	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN			
<b>Part B</b>	<b>pin</b>	<b>Core board pin definition</b>	<b>Pad type</b>	<b>IO Pull</b>	<b>Function for Floor(MB-JD4-RV11091126)</b>	<b>Default function description</b>	<b>IO Power domain</b>	<b>RV1126 Pin Number</b>	<b>RV1126 Pin Name</b>
	2	GND_21	G		GND	GND			GND_21
	4	GPIO1_A2_U	I/O	UP	LCD_RST	Mipi Reset,active low	1.8V	R4	I2S1_SDI_M0 / FSPI_D3 / FLASH_RDN / GPIO1_A2_U





6	NC_16			NC	NC			NC_16
8	GPIO0_D6_D	I/O	DOWN	LCD_PWREN	LCD_PWOER_EN	1.8V	T3	I2S1_SDO_M0 / FSPI_D2 / GPIO0_D6_D
10	NC_17			NC	NC			NC_17
12	I2C0_SCL_PMIC	I/O	DOWN	NC	I2C serial port 1, Core board internal pull up Resistor 2.2K	3.3V	AA7	I2C0_SCL / GPIO0_B4_D
14	I2C0_SDA_PMIC	I/O	DOWN	NC	I2C serial port 1, Core board internal pull up Resistor 2.2K	3.3V	Y7	I2C0_SDA / GPIO0_B5_D
16	NC_18			NC	NC			NC_18
18	NC_19			NC	NC			NC_19
20	NC_20			NC	NC			NC_20
22	I2C1_SDA	I/O	UP	I2C1_SDA	I2C serial port 1, need pull up Resistor 2.2K	1.8V	W19	I2C1_SDA / UART4_RTSN_M2 / GPIO1_D2_U
24	I2C1_SCL	I/O	UP	I2C1_SCL	I2C serial port 1, need pull up Resistor 2.2K	1.8V	Y21	I2C1_SCL / UART4_CTSN_M2 / GPIO1_D3_U
26	GND_22	G		GND	GND			GND_22
28	NC_21			NC	NC			NC_21
30	PDM_SDIO /GPIO3_D6_D	I/O	DOWN	SPK_CTL_H	Speaker_EN ,active hight	1.8V	AA12	I2S0_SDIO_M0 / PDM_SDIO_M0 / ACODEC_DAC_DATA1 / GPIO3_D6_D
32	PDM_CLK/GPIO3_D4_D	I/O	DOWN	GPIO3_D4	GPIO3_D4	1.8V	Y12	I2S0_LRCK_RX_M0 / PDM_CLK0_M0 / ACODEC_ADC_SYNC / GPIO3_D4_D
34	GND_23	G		GND	GND			GND_23
36	NC_22			NC	NC			NC_22
38	PMIC_EXT_EN	O		PMIC_EXT_EN	PMIC power_en output,active hight Core board internal series resistance 1K	5.0V		PMIC_EXT_EN
40	GND_24	G		GND	GND			GND_24



42	SDMMC0_DET	I/O	UP	SDMMC0_DET	TF_Card DET,active low	1.8V	U7	SDMMC0_DET / GPIO0_A3_U
44	GND_25	G		GND	GND			GND_25
46	SDMMC0_CMD	I/O	UP	SDMMC0_CMD	SDMMC0_CMD	Note 1	Y13	UART3_CTSN_M1 / RISC-V_JTAG_TDI / SDMMC0_CMD / GPIO1_B1_U
48	SDMMC0_CLK	I/O	UP	SDMMC0_CLK	SDMMC0_CLK		AA13	UART3_RTSN_M1 / RISC-V_JTAG_TDO / SDMMC0_CLK / GPIO1_B0_U
50	SDMMC0_D1	I/O	UP	SDMMC0_D1	SDMMC0_D1		W13	UART2_TX_M0 / TEST_CLK0_OUT / RISC-V_JTAG_TRSTN / SDMMC0_D1 / GPIO1_A5_U
52	SDMMC0_D0	I/O	UP	SDMMC0_D0	SDMMC0_D0		Y14	UART2_RX_M0 / TEST_CLK1_OUT / SDMMC0_D0 / GPIO1_A4_U
54	SDMMC0_D2	I/O	UP	SDMMC0_D2	SDMMC0_D2		V13	UART3_RX_M1 / A7_JTAG_TCK_M0 / RISC-V_JTAG_TCK / SDMMC0_D2 / GPIO1_A6_U
56	SDMMC0_D3	I/O	UP	SDMMC0_D3	SDMMC0_D3		U13	UART3_TX_M1 / A7_JTAG_TMS_M0 / RISC-V_JTAG_TMS / SDMMC0_D3 / GPIO1_A7_U
Note 1: Default is 3.3V; SDMMC0 1.8V(SDIO3.0 model)/3.3V(SDIO2.0 model) Auto								
58	GND_26	G		GND	GND			GND_26
60	MIPI_CSI_RX0_CLKN	I		MIPI_CSI_RX0_CLKN	MIPI_CSI_RX0_CLKN	1.8V	V15	MIPI_CSI_RX0_CLKN / LVDS0_CLKN
62	MIPI_CSI_RX0_CLKP	I		MIPI_CSI_RX0_CLKP	MIPI_CSI_RX0_CLKP	1.8V	U15	MIPI_CSI_RX0_CLKP / LVDS0_CLKP
64	MIPI_CSI_RX0_D0P	I		MIPI_CSI_RX0_D0P	MIPI_CSI_RX0_D0P	1.8V	V16	MIPI_CSI_RX0_D0P / LVDS0_RX0P
66	MIPI_CSI_RX0_D0N	I		MIPI_CSI_RX0_D0N	MIPI_CSI_RX0_D0N	1.8V	U16	MIPI_CSI_RX0_D0N / LVDS0_RX0N
68	MIPI_CSI_RX1_CLKP	I		MIPI_CSI_RX1_CLKP	MIPI_CSI_RX1_CLKP	1.8V	V18	MIPI_CSI_RX1_CLKP / LVDS1_CLKP
70	MIPI_CSI_RX1_CLKN	I		MIPI_CSI_RX1_CLKN	MIPI_CSI_RX1_CLKN	1.8V	W18	MIPI_CSI_RX1_CLKN / LVDS1_CLKN



72	NC_23			NC	NC			NC_23
74	MIPI_CSI_PWDN1	I/O	DOWN	MIPI_CSI_PWDN1	MIPI_CSI_Powerdown1	3.3V	T18	CIF_D1_M0 / RGMII_CRS_M0 / I2S0_LRCK_TX_M1 / UART4_RX_M0 / I2C3_SDA_M0 / PWM9_M0 / GPIO3_A5_D
76	GND_27	G		GND	GND			GND_27
78	MIPI_CSI_RST1	I/O	DOWN	MIPI_CSI_RST1	MIPI_CSI_RST1,active low	1.8V	V11	I2S0_SDO3_SDI1_M0 / PDM_SDI1_M0 / I2C4_SDA_M1 / AUDPWM_R_M0 / AUDDSM_RP / GPIO4_A1_D
80	MIPI_CSI_RST0	I/O	DOWN	MIPI_CSI_RST0	MIPI_CSI_RST0,active low	1.8V	U11	I2S0_SDO2_SDI2_M0 / PDM_SDI2_M0 / I2C4_SCL_M1 / AUDPWM_L_M0 / AUDDSM_RN / GPIO4_A0_D
82	FSPI_CLK/ GPIO1_A3_D	I/O	UP	BL_EN	Black light EN ,active hight	3.3V	R3	FSPI_CLK / EMMC_RSTN / FLASH_WPN / GPIO1_A3_D
84	FSPI_CS0N/ GPIO0_D4_U	I/O	UP	TP_RST	TP_Reset,active low	3.3V	U2	I2S1_MCLK_M0 / FSPI_CS0N / FLASH_CS0N / GPIO0_D4_U
86	FSPI_D0/ GPIO1_A0_D	I/O	UP	TP_INT	TP_INT	3.3V	T2	I2S1_LRCK_M0 / FSPI_D0 / FLASH_ALE / GPIO1_A0_D
88	FSPI_D1/ GPIO1_A1_U	I/O	UP	GPIO0_D6	GPIO0_D6	3.3V	R2	I2S1_SCLK_M0 / FSPI_D1 / FLASH_RDYN / GPIO1_A1_U
90	NC_24			NC	NC			NC_24
92	NC_25			NC	NC			NC_25
94	PWM0_M0/UART1_TX_M0	I/O	DOWN	UART1_TX	UART1_TX	3.3V	W8	UART1_TX_M0 / PWM0_M0 / GPIO0_B6_D
96	PWM1_M0/UART1_RX_M0	I/O	DOWN	UART1_RX	UART1_RX	3.3V	V9	UART1_RX_M0 / PWM1_M0 / GPIO0_B7_D
98	NC_26			NC	NC			NC_26
100	UART2_RX/DEBUG_RX	I/O	UP	UART2_RX/DEBUG_RX	UART2_RX/DEBUG_RX	3.3V	H16	A7_JTAG_TMS_M1 / UART2_RX_M1 / GPIO3_A3_U



102	UART2_TX/DEBUG_TX	I/O	UP	UART2_TX/DEBUG_TX	UART2_TX/DEBUG_TX	3.3V	G18	A7_JTAG_TCK_M1 / UART2_TX_M1 / GPIO3_A2_U
104	PWM10_M0 / GPIO3_A6_D	I/O	DOWN	LCD_BL_PWM	LCD_BL_PWM	3.3V	P17	CIF_D2_M0 / RGMII_COL_M0 / I2S0_SDO0_M1 / UART5_TX_M0 / CAN_RXD_M1 / PWM10_M0 / GPIO3_A6_D
106	PWM4_M1/ GPIO2_A7_D	I/O	DOWN	PWM4_M1/UART4_RX	PWM4_M1/UART4_RX output	3.3V	M20	I2S2_SDO_M1 / UART4_RX_M1 / PWM4_M1 / SPI0_CS0N_M2 / LCDC_D3 / GPIO2_A7_D
108	PWM3_IR_M1/ GPIO2_B0_D	I/O	DOWN	PWM3_M1	PWM3_M1 output	3.3V	L19	I2S2_SDI_M1 / UART5_TX_M1 / PWM3_IR_M1 / SPI0_MOSI_M2 / LCDC_D4 / GPIO2_B0_D
110	I2C5_SCL_M0/GPIO2_A5_D	I/O	DOWN	3G_PWR_EN	3G_Power_EN,active high	3.3V	L17	I2C5_SCL_M0 / UART4_CTSN_M1 / RGMII_CRS_M1 / CIF_D1_M1 / LCDC_D1 / GPIO2_A5_D
112	I2C5_SDA_M0/GPIO2_B3_D	I/O	DOWN	CIFD3/PWM0_M1	CIFD3/PWM0_M1 output	3.3V	K17	I2C5_SDA_M0 / I2S2_MCLK_M1 / UART5_CTSN_M1 / PWM0_M1 / SPI0_CS1N_M2 / CIF_D3_M1 / LCDC_D7 / GPIO2_B3_D
114	NC_27			NC	NC			NC_27
116	PWM6_M1	I/O	DOWN	PWM6_M1/SPI1_CS0_M2	PWM6_M1/SPI1_CS0_M2	3.3V	J17	I2C3_SCL_M1 / PWM6_M1 / SPI1_CS0N_M2 / LCDC_DEN / GPIO2_D4_D
118	PWM10_M1	I/O	DOWN	PWM10_M1/SPI1_CLK_M2	PWM10_M1/SPI1_CLK_M2	3.3V	H17	I2C3_SDA_M1 / PWM10_M1 / SPI1_CLK_M2 / LCDC_HSYNC / GPIO2_D5_D
120	RMII_TXD3/GPIO2_A4_D	I/O	DOWN	RMII_TXD3	RMII_TXD3 Core board internal series resistance 22R	3.3V	J18	UART4_RTSN_M1 / RGMII_TXD3_M1 / CIF_D0_M1 / LCDC_D0 / GPIO2_A4_D
122	RMII_RXD2/GPIO2_C7_D	I/O	DOWN	RMII_RXD2	RMII_RXD2	3.3V	G19	I2S1_MCLK_M2 / RGMII_RXD2_M1 / CIF_D15_M1 / LCDC_D19 / GPIO2_C7_D
124	GND_28	G		GND	GND			GND_28



126	RMII_RXCLK/P_IRIS_EN_H	I/O	DOWN	RMII_RXCLK	RMII_RXCLK	3.3V	F19	I2S1_SDI_M2 / RGMII_RXCLK_M1 / CIF_HSYNC_M1 / LCDC_D23 / GPIO2_D3_D
128	NC_28			NC	NC			NC_28
130	OTG_ID	I	UP	OTG_ID	OTG_DET.Active low	1.8V	Y3	OTG_ID
132	NC			NC	NC			NC
134	NC_29			NC	NC			NC_29
136	PWM9_M1	I/O	DOWN	PWM9_M1/SPI1_MOSI_M2	PWM9_M1/SPI1_MOSI_M2	3.3V	C21	UART3_RTSN_M2 / PWM9_M1 / SPI1_MOSI_M2 / LCDC_VSYNC / GPIO2_D6_D
138	GND_29	G		GND	GND			GND_29
140	MIPI_DSI_TX0_CLKP	O		MIPI_DSI_CLKP	MIPI_DSI_CLKP	1.8V	C19	MIPI_DSI_TX0_CLKP
142	MIPI_DSI_TX0_CLKN	O		MIPI_DSI_CLKN	MIPI_DSI_CLKN	1.8V	C18	MIPI_DSI_TX0_CLKN
144	NC_30			NC	NC			NC_30
146	NC_31			NC	NC			NC_31
148	NC_32			NC	NC			NC_32
150	ADC_IN4	I	UP	ADCIN4	ADC4 input, Core board interiorl pull up Resistor 10K	1.8V	C17	ADC_IN4
152	ADC_IN0	I	UP	RECOVER	ADC0 input,RECOVER KEY, active low Core board interiorl pull up Resistor 10K	1.8V	E17	ADC_IN0
154	ADC_IN2	I	UP	ADCIN2	ADC2 input, Core board interiorl pull up Resistor 10K	1.8V	B18	ADC_IN2
156	ADC_IN3	I	UP	ADCIN3	ADC3 input, Core board interiorl pull up Resistor 10K	1.8V	A18	ADC_IN3
158	GND_30	G		GND	GND			GND_30



160	NC_33			NC	NC			NC_33
162	PCM_RX/ GPIO1_C5_D	I/O	DOWN	HP_DET	Headphone plug in det,active low	1.8V	E13	I2S2_SDI_M0 / SPI1_MISO_M1 / FLASH_TRIG_IN / GPIO1_C5_D
164	PCM_CLK/ GPIO1_C6_D	I/O	DOWN	USB_OTG_EN	OTG power en ,active hight	1.8V	D13	I2S2_SCLK_M0 / SPI1_CLK_M1 / PRELIGHT_TRIG_OUT / UART1_RTSN_M1 / GPIO1_C6_D
166	PCM_SYNC/ GPIO1_C7_D	I/O	DOWN	MUTE	Headphone output en,active hight	1.8V	C13	I2S2_LRCK_M0 / SPI1_CS0N_M1 / UART1_CTSN_M1 / GPIO1_C7_D
168	PCM_TX/ GPIO1_C4_D	I/O	DOWN	USB_HOST_EN	USB Host power en ,active hight	1.8V	B14	I2S2_SDO_M0 / SPI1_MOSI_M1 / FLASH_TRIG_OUT / GPIO1_C4_D
170	UART0_TX	I/O	UP	UART0_TX	UART0_TX for BT	1.8V	C14	UART0_TX / GPIO1_C3_U
172	UART0_RX	I/O	UP	UART0_RX	UART0_RX for BT	1.8V	D14	UART0_RX / GPIO1_C2_U
174	UART0_CTSN	I/O	UP	UART0_CTSN	UART0_CTSN for BT	1.8V	A15	UART0_CTSN / GPIO1_C1_U
176	UART0_RTSN	I/O	UP	UART0_RTSN	UART0_RTSN for BT	1.8V	B15	UART0_RTSN / GPIO1_C0_U
178	NC_34			NC	NC			NC_34
180	GND_31	G		GND	GND			GND_31
182	GMAC_MDIO_M0	I/O	DOWN	GMAC_MDIO_M0/D15	GMAC_MDIO_M0/D15	3.3V	N20	CIF_D15_M0 / RGMII_MDIO_M0 / PDM_CLK1_M1 / GPIO3_C3_D
184	GMAC_MDC_M0	I/O	DOWN	GMAC_MDC_M0/VSYNC	GMAC_MDC_M0/VSYNC	3.3V	N21	CIF_VSYNC_M0 / RGMII_MDC_M0 / UART3_RTSN_M0 / GPIO3_C4_D
186	GMAC_TXCLK_M0	I/O	DOWN	GMAC_TXCLK_M0/CLKOUT	GMAC_TXCLK_M0/CLKOUT Core board internal series resistance 22R	3.3V	P19	CIF_CLKOUT_M0 / RGMII_TXCLK_M0 / UART3_TX_M0 / GPIO3_C6_D
188	GMAC_RXCLK_M0	I/O	DOWN	GMAC_RXCLK_M0/NHYNC	GMAC_RXCLK_M0/NHYNC	3.3V	P20	CIF_HSYNC_M0 / RGMII_RXCLK_M0 / UART3_RX_M0 / GPIO3_C7_D
190	GND_32	G		GND	GND			GND_32
192	GMAC_CLK_M0	I/O	DOWN	GMAC_CLK_M0/D12	MAC reference clock output /CIF_D12	3.3V	N19	CIF_D12_M0 / RGMII_CLK_M0 / PDM_CLK0_M1 / SPI1_CLK_M0 /



									GPIO3_C0_D
194	GMAC_RXD1_M0	I/O	DOWN	GMAC_RXD1_M0/D11	MAC receive data/CIF_D11	3.3V	R21		CIF_D11_M0 / RGMII_RXD1_M0 / PDM_SDI3_M1 / SPI1_MISO_M0 / GPIO3_B7_D
196	GMAC_RXD3_M0	I/O	DOWN	GMAC_RXD3_M0/D4	MAC receive data/CIF_D4	3.3V	T19		CIF_D4_M0 / RGMII_RXD3_M0 / I2S0_MCLK_M1 / UART5_RTSN_M0 / I2C5_SCL_M1 / GPIO3_B0_D
198	GMAC_RXD0_M0	I/O	DOWN	GMAC_RXD0_M0/D10	MAC receive data/CIF_D10	3.3V	R20		CIF_D10_M0 / RGMII_RXD0_M0 / PDM_SDI2_M1 / SPI1_MOSI_M0 / GPIO3_B6_D
200	GMAC_RXD2_M0	I/O	DOWN	PWM11_M0	PWM11_M0/CIF_D3	3.3V	R18		CIF_D3_M0 / RGMII_RXD2_M0 / I2S0_SDI0_M1 / UART5_RX_M0 / CAN_TXD_M1 / PWM11_IR_M0 / GPIO3_A7_D
202	GMAC_RXDV_M0	I/O	DOWN	GMAC_RXDV_M0/D13	MAC receive data valid/CIF_D13	3.3V	M17		CIF_D13_M0 / RGMII_RXDV_M0 / PDM_SDI0_M1 / GPIO3_C1_D
204	GMAC_TXD0_M0	I/O	DOWN	GMAC_TXD0_M0/D7	MAC transmit data /CIF_D7 Core board internal series resistance 22R	3.3V	R19		CIF_D7_M0 / RGMII_TXD0_M0 / I2S0_SDO1_SDI3_M1 / UART4_CTSN_M0 / GPIO3_B3_D
206	GMAC_TXD2_M0	I/O	DOWN	GMAC_TXD2_M0/D5	MAC transmit data/CIF_D5 Core board internal series resistance 22R	3.3V	T20		CIF_D5_M0 / RGMII_TXD2_M0 / I2S0_SCLK_RX_M1 / UART5_CTSN_M0 / I2C5_SDA_M1 / GPIO3_B1_D
208	GMAC_TXD3_M0	I/O	DOWN	GMAC_TXD3_M0/D6	MAC transmit data/CIF_D6 Core board internal series resistance 22R	3.3V	N17		CIF_D6_M0 / RGMII_TXD3_M0 / I2S0_LRCK_RX_M1 / UART4_RTSN_M0 / GPIO3_B2_D
210	GMAC_TXD1_M0	I/O	DOWN	GMAC_TXD1_M0/D8	MAC transmit data/CIF_D8 Core board internal series resistance 22R	3.3V	T21		CIF_D8_M0 / RGMII_TXD1_M0 / I2S0_SDO2_SDI2_M1 / SPI1_CS1N_M0 / GPIO3_B4_D
212	GMAC_TXEN_M0	I/O	DOWN	GMAC_TXEN_M0/D9	MAC transmit enable /CIF_D9 Core board internal series resistance 22R	3.3V	N18		CIF_D9_M0 / RGMII_TXEN_M0 / I2S0_SDO3_SDI1_M1 / SPI1_CS0N_M0 / GPIO3_B5_D
214	EPHY_PMEB	I/O	DOWN	EPHY_PMEB	PHY interrupt input,	3.3V	L20		I2S2_SCLK_M1 / UART5_RX_M1 /



								PWM2_M1 / SPI0_MISO_M2 / LCDC_D5 / GPIO2_B1_D
216	EPHY_RSTN	I/O	DOWN	EPHY_RSTN	phy reset output,active low	3.3V	K16	I2S2_LRCK_M1 / UART5_RTSN_M1 / PWM1_M1 / SPI0_CLK_M2 / LCDC_D6 / GPIO2_B2_D
218	RESET_KEY	I		RESET	system reset signal Input, External connection Reset key, active low	1.8V	W7	RESET_KEY
220	NC_35			NC	NC			NC_35
222	GND_33	G		GND	GND			GND_33
224	VCC_1V8	P		VCC_1V8	1.8V output,VCC_1V8 Total Max current 200mA (Pin224/225 same net)	1.8V		
226	VCC3V3_SD	P		VCC3V3_SD	3.3V output for TF card,VCC3V3_SD Total Max current 200mA (Pin226/227 same net)	3.3V		
228	VCC1V2_DVDD	P		VCC1V2_DVDD	1.2V output,VCC1V2_DVDD Total Max current 300mA (Pin228/229 same net)	1.2V		
230	VCC_3V3	P		VCC_3V3	3.3V output,VCC_3V3 Total Max current 400mA (Pin230/231/234/235 same net)	3.3V		
232	VCC_RTC	P		VCC_RTC	3.3-5.0V input for RTC, Max current 50mA	5.0V		
234	VCC_3V3	P		VCC_3V3	3.3V output,VCC_3V3 Total Max current 400mA (Pin230/231/234/235 same net)	3.3V		
236	VCC2V8_AVDD	P		VCC2V8_AVDD	2.8V output,VCC2V8_AVDD Total Max current 300mA (Pin236/237 same net)	2.8V		
238	VCC1V8_DOVDD	P		VCC1V8_DOVDD	1.8V output,VCC1V8_DOVDD Total Max current 300mA (Pin238/239/ same net)	1.8V		
240	NC_36			NC	NC			NC_36
242	NC_37			NC	NC			NC_37
244	GND_34	G		GND	Power ground			





<b>246</b>	GND_35	G		GND	Power ground			
<b>248</b>	GND_36	G		GND	Power ground			
<b>250</b>	GND_37	G		GND	Power ground			
<b>252</b>	VCC5V0_SYS_6	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN		
<b>254</b>	VCC5V0_SYS_7	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN		
<b>256</b>	VCC5V0_SYS_8	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN		
<b>258</b>	VCC5V0_SYS_9	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN		
<b>260</b>	VCC5V0_SYS_10	P		VCC5V0_SYS	Input Voltage 4.8V-5.5V	5.0V_IN		



## T-CHIP INTELLIGENCE TECHNOLOGY

---



Contact Us  
(+86)18688117175



E-mail  
[global@t-firefly.com](mailto:global@t-firefly.com)



Website  
[www.t-firefly.com](http://www.t-firefly.com)



Address  
Room 2101, Hongyu Building, #57 Zhongshan 4Rd, East District,  
Zhongshan, Guangdong, China.