



# SIM7500E-L1C



Multi-Band

FOTA\*

Cat1

VoLTE

Compact  
Size

GNSS

TCP/IP

USB 2.0

SSL

## Product Description

The SIM7500E-L1C is Multi-Band LTE-FDD/HSPA+/UMTS/EDGE/GPRS/GSM module solution in a SMT type which supports LTE CAT1 up to 10Mbps data transfer. It has strong extension capability with rich interfaces including UART, USB2.0, GPIO etc. The module provides much flexibility and ease of integration for customer's application.

The package of SIM7500E-L1C is LGA. AT commands of SIM7500E-L1C are compatible with SIM7500/SIM7600 Series modules. This also minimize the investments of customers, and enables a short time-to-market.

It is designed for applications that need high throughput data communication in a variety of radio propagation conditions. Due to the unique combination of performance, security and flexibility, this module is ideally suited for many applications.

## Key Benefits

- High throughput data communication.
- The AT commands of SIM7500E-L1C are compatible with SIM7500/SIM7600 Series modules.

Smart machine Smart decision

Tel: 86-21-31575100/31575200

simcom@simcom.com

www.simcomm2m.com

## General Features

- Supply voltage range: 3.4V ~ 4.2V, Typ: 3.8V
- Control Via AT Commands
- Operation temperature: -40°C to +85°C
- Dimensions: 24.0\*27.0\*2.75mm
- Weight: 4.0g
- LTE-FDD/LTE-TDD/UMTS/HSDPA/HSUPA/HSPA+
- GNSS:GPS/GLONASS/BeiDou

## Data

- LTE CAT1
  - Uplink up to 5Mbps
  - Downlink up to 10Mbps
- HSDPA/HSUPA
  - Uplink up to 2.2Mbps
  - Downlink up to 2.8Mbps
- HSPA+
  - Uplink up to 5.76Mbps
  - Downlink up to 42.0Mbps
- UMTS
  - Uplink/Downlink up to 384.0Kbps
- EDGE
  - Uplink/Downlink up to 236.8Kbps
- GPRS
  - Uplink/Downlink up to 85.6Kbps

## Frequency

LTE-FDD	B1/B3/B7/B8/B20
UMTS/HSDPA/HSPA+	B1/B8
GSM/GPRS/EDGE	900/1800MHz

## Interfaces

- USB Driver for Microsoft Windows 2000/XP/Vista/Win7/Win8/Win10
- USB Driver for Linux /Android
- RIL supporting for Android 2.3/4.0/5.0/6.0/7.0
- MBIM to Win8
- Firmware update via USB
- TCP/IP/IPV4/IPV6/Multi-PDP/FTP/FTPS /HTTP/HTTPS/DNS
- SSL3.0/TLS1.0/TLS1.2
- DTMF (Sending and Receiving)
- Audio Playing
- USB Audio and VoLTE
- FOTA\*

## Other Features

- USB2.0 with High speed up to 480Mbps
- UART
- (U)SIM card (1.8V /3.0V)
- Digital Audio through PCM
- ADC
- I2C
- GPIO
- Antenna: Primary/Rx-diversity/GNSS

## Approvals

- CE\*

**Smart machine Smart decision**


Tel:86-21-31575100/31575200

simcom@simcom.com

www.simcomm2m.com

\* Under Development

# SIM7600E-L1C

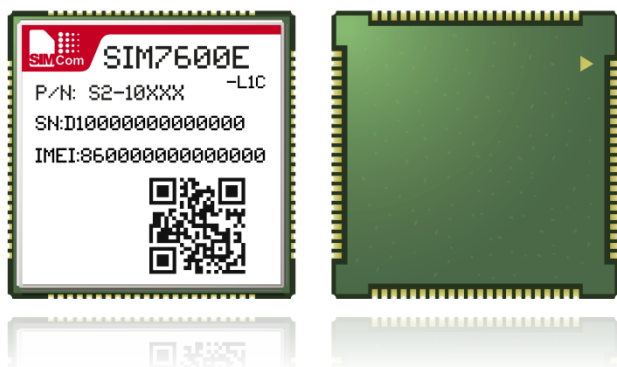

Multi-Band

FOTA\*

Cat1

VoLTE

Compact  
Size

GNSS

TCP/IP

USB 2.0

SSL

## Product Description

The SIM7600E-L1C is Multi-Band LTE-FDD/HSPA+/UMTS/EDGE/GPRS/GSM module solution in a SMT type which supports LTE CAT1 up to 10Mbps data transfer.

It has strong extension capability with rich interfaces including UART,USB2.0, GPIO etc. The module provides much flexibility and ease of integration for customer's application.

The package of SIM7600E-L1C is LCC. AT commands of SIM7600E-L1C are compatible with SIM7500/SIM7600 Series modules. This also minimize the investments of customers, and enables a short time-to-market.

It is designed for applications that need high throughput data communication in a variety of radio propagation conditions. Due to the unique combination of performance, security and flexibility, this module is ideally suited for many applications.

## Key Benefits

- High throughput data communication.
- The AT commands of SIM7600E-L1C are compatible with SIM7500/SIM7600 Series modules.

**Smart machine Smart decision**

Tel:86-21-31575100/31575200

simcom@simcom.com

www.simcomm2m.com

## General Features

- Supply voltage range: 3.4V ~ 4.2V, Typ: 3.8V
- Control Via AT Commands
- Operation temperature: -40°C to +85°C
- Dimensions: 30.0\*30.0\*2.9mm
- Weight: 5.7g
- LTE-FDD/LTE-TDD/UMTS/HSDPA/HSUPA/HSPA+
- GNSS:GPS/GLONASS/BeiDou

## Data

- LTE CAT1
  - Uplink up to 5Mbps
  - Downlink up to 10Mbps
- HSDPA/HSUPA
  - Uplink up to 2.2Mbps
  - Downlink up to 2.8Mbps
- HSPA+
  - Uplink up to 5.76Mbps
  - Downlink up to 42.0Mbps
- UMTS
  - Uplink/Downlink up to 384.0Kbps
- EDGE
  - Uplink/Downlink up to 236.8Kbps
- UMTS
  - Uplink/Downlink up to 85.6Kbps

## Frequency

LTE-FDD	B1/B3/B7/B8/B20
UMTS/HSDPA/HSPA+	B1/B8
GSM/GPRS/EDGE	900/1800MHz

## Interfaces

- USB Driver for Microsoft Windows 2000/XP/Vista/Win7/Win8/Win10
- USB Driver for Linux /Android
- RIL supporting for Android 2.3/4.0/5.0/6.0/7.0
- MBIM to Win8
- Firmware update via USB
- TCP/IP/IPV4/IPV6/Multi-PDP/FTP/FTPS /HTTP/HTTPS/DNS
- SSL3.0/TLS1.0/TLS1.2
- DTMF (Sending and Receiving)
- Audio Playing
- USB Audio and VoLTE
- FOTA\*

## Other Features

- USB2.0 with High speed up to 480Mbps
- UART
- (U)SIM card (1.8V /3.0V)
- Digital Audio through PCM
- MMC/SD
- ADC
- I2C
- GPIO
- Antenna: Primary/Rx-diversity/GNSS

## Approvals

- CE\*