




1 2 3 4 5 6 7


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

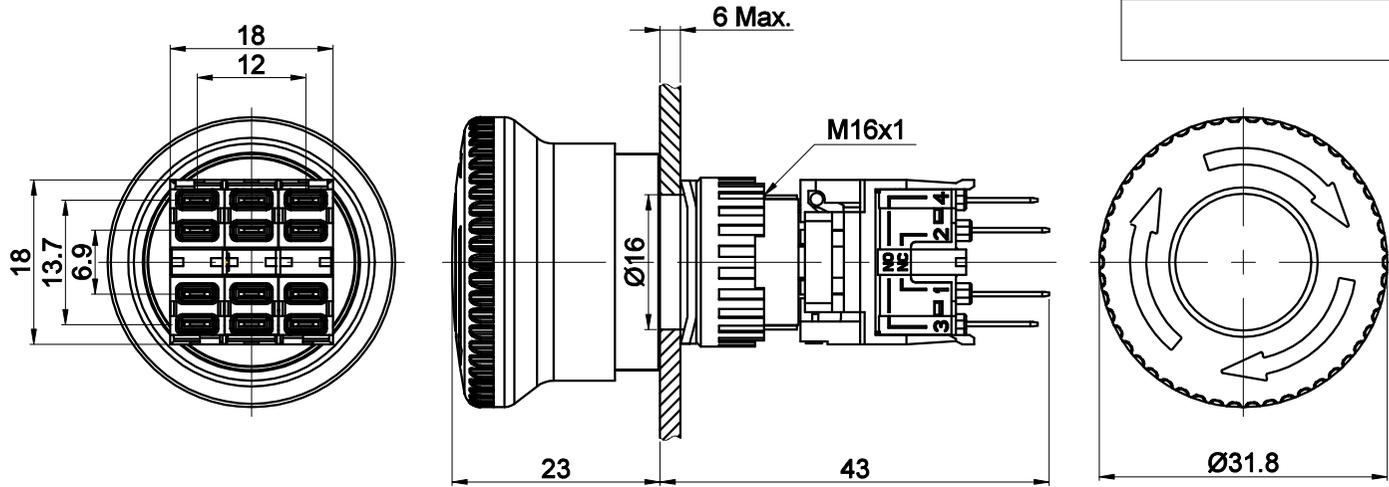

PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm



Contact Composition
 1, 2, 3, 4 are one set;
 1,2 are normal closed(NC);
 3,4 are normal opened(NO).



Seal Ring

Part Number: LAS1-BY-□TSB/R

"□"	Contact structure
11	1NO1NC
22	2NO2NC
33	3NO3NC

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC220V/0.1A.
- 2.Mechanical Life: ≥200,000cycles(Momentary).
- 3.Electrical Life: ≥50,000cycles.
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥100MΩ.
- 6.Dielectric Strength:
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25°C~ +55°C(No Freezing).
- 8.Operating Force:About 8N.
- 9.Operating Travel: About 3mm.
- 10.IP Class: IP40.
- 11.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button:PBT.
- 3.Body:PC.
- 4.Base: PC.

BRAND 品牌 ONPOW	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	USED 用途 FINISH 处理 SCALE 比例 1.2 / 1
DIMENSIONS 0.00 TO 18.00mm 18.01 TO 30.00mm 30.01 TO 50.00mm 50.01 TO 80.00mm	TOLERANCE ±0.43mm ±0.52mm ±0.62mm ±0.74mm	TITLE 名称 Emergency Stop Switch DWG NO. 图号 LAS1-BY-TSB(不带灯) FILE NAME 档案名称 LAS1-BY-TSB.dwg
SHEET 张 1 / 1		SIZE 图纸 A4 REV. 更改 1

1 2 3 4 5 6 7