




廠款  
A



- ————— 1
- ————— 2
- ————— 3
- ————— ≡

  
**PAY ATTENTION:**  
 THE CENTRAL SCREW MUST BE  
 CLOSED

SCALE 2:1

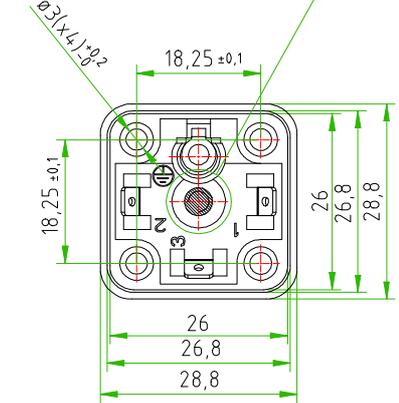

PRODUCT TYPE	SQUARE BASE EN175301-803(type-A)
COLOUR BASE	BLACK
MATERIAL BASE	PA66
CONTACTS TYPE	MALE TO SOLDERED
CONTACTS MATERIAL	BRASS + SILVER PLATED
CONTACTS SPACING	18mm
NUMBER OF CONTACTS	3POLES+EARTH
FIXING HOLES	N°4
DIAMETER OF FIXING HOLES	Ø3mm
M3 CENTRAL NUT TYPE	CLOSED
GASKET TYPE	FLAT(NBR)
M3 FIXING SCREW (x4)	L=10mm
M3 EARTH SCREW	L=4,8mm
PROTECTION CLASS	IP65
TEMPERATURE RANGE	FROM -40°C TO +90°C
RATED VOLTAGE	250V AC / 300V DC
NOMINAL CURRENT	10A

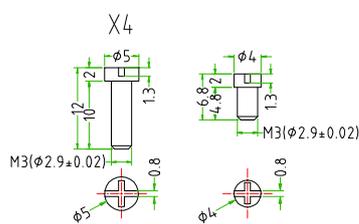

						材质			BRS-BB005	BRS-BB005 外形图	
						型号					
标记	处数	分区	更改文件号	签名	年月日	货号			阶段标记	重量	比例
设计	JOE	2022.6.22						S			
校对									共张	第张	投影法
审核	LEE	2022.6.22						≡			
批准	PAUL	2022.6.22									

未注尺寸公差		
线性尺寸公差按 GB/T 1804-H	倒圆半径和倒角高度	角度尺寸
0.5~4 ±0.1	0.5~3 ±0.1	~10 ±1°
>4~30 ±0.2	>3~6 ±0.2	>10~60 ±30°
>30~120 ±0.3	>6~30 ±0.3	>60~120 ±20°
>120~400 ±0.5	>30~100 ±0.5	>120~400 ±10°
>400~1000 ±0.8	>100 ±0.8	>400 ±5°