




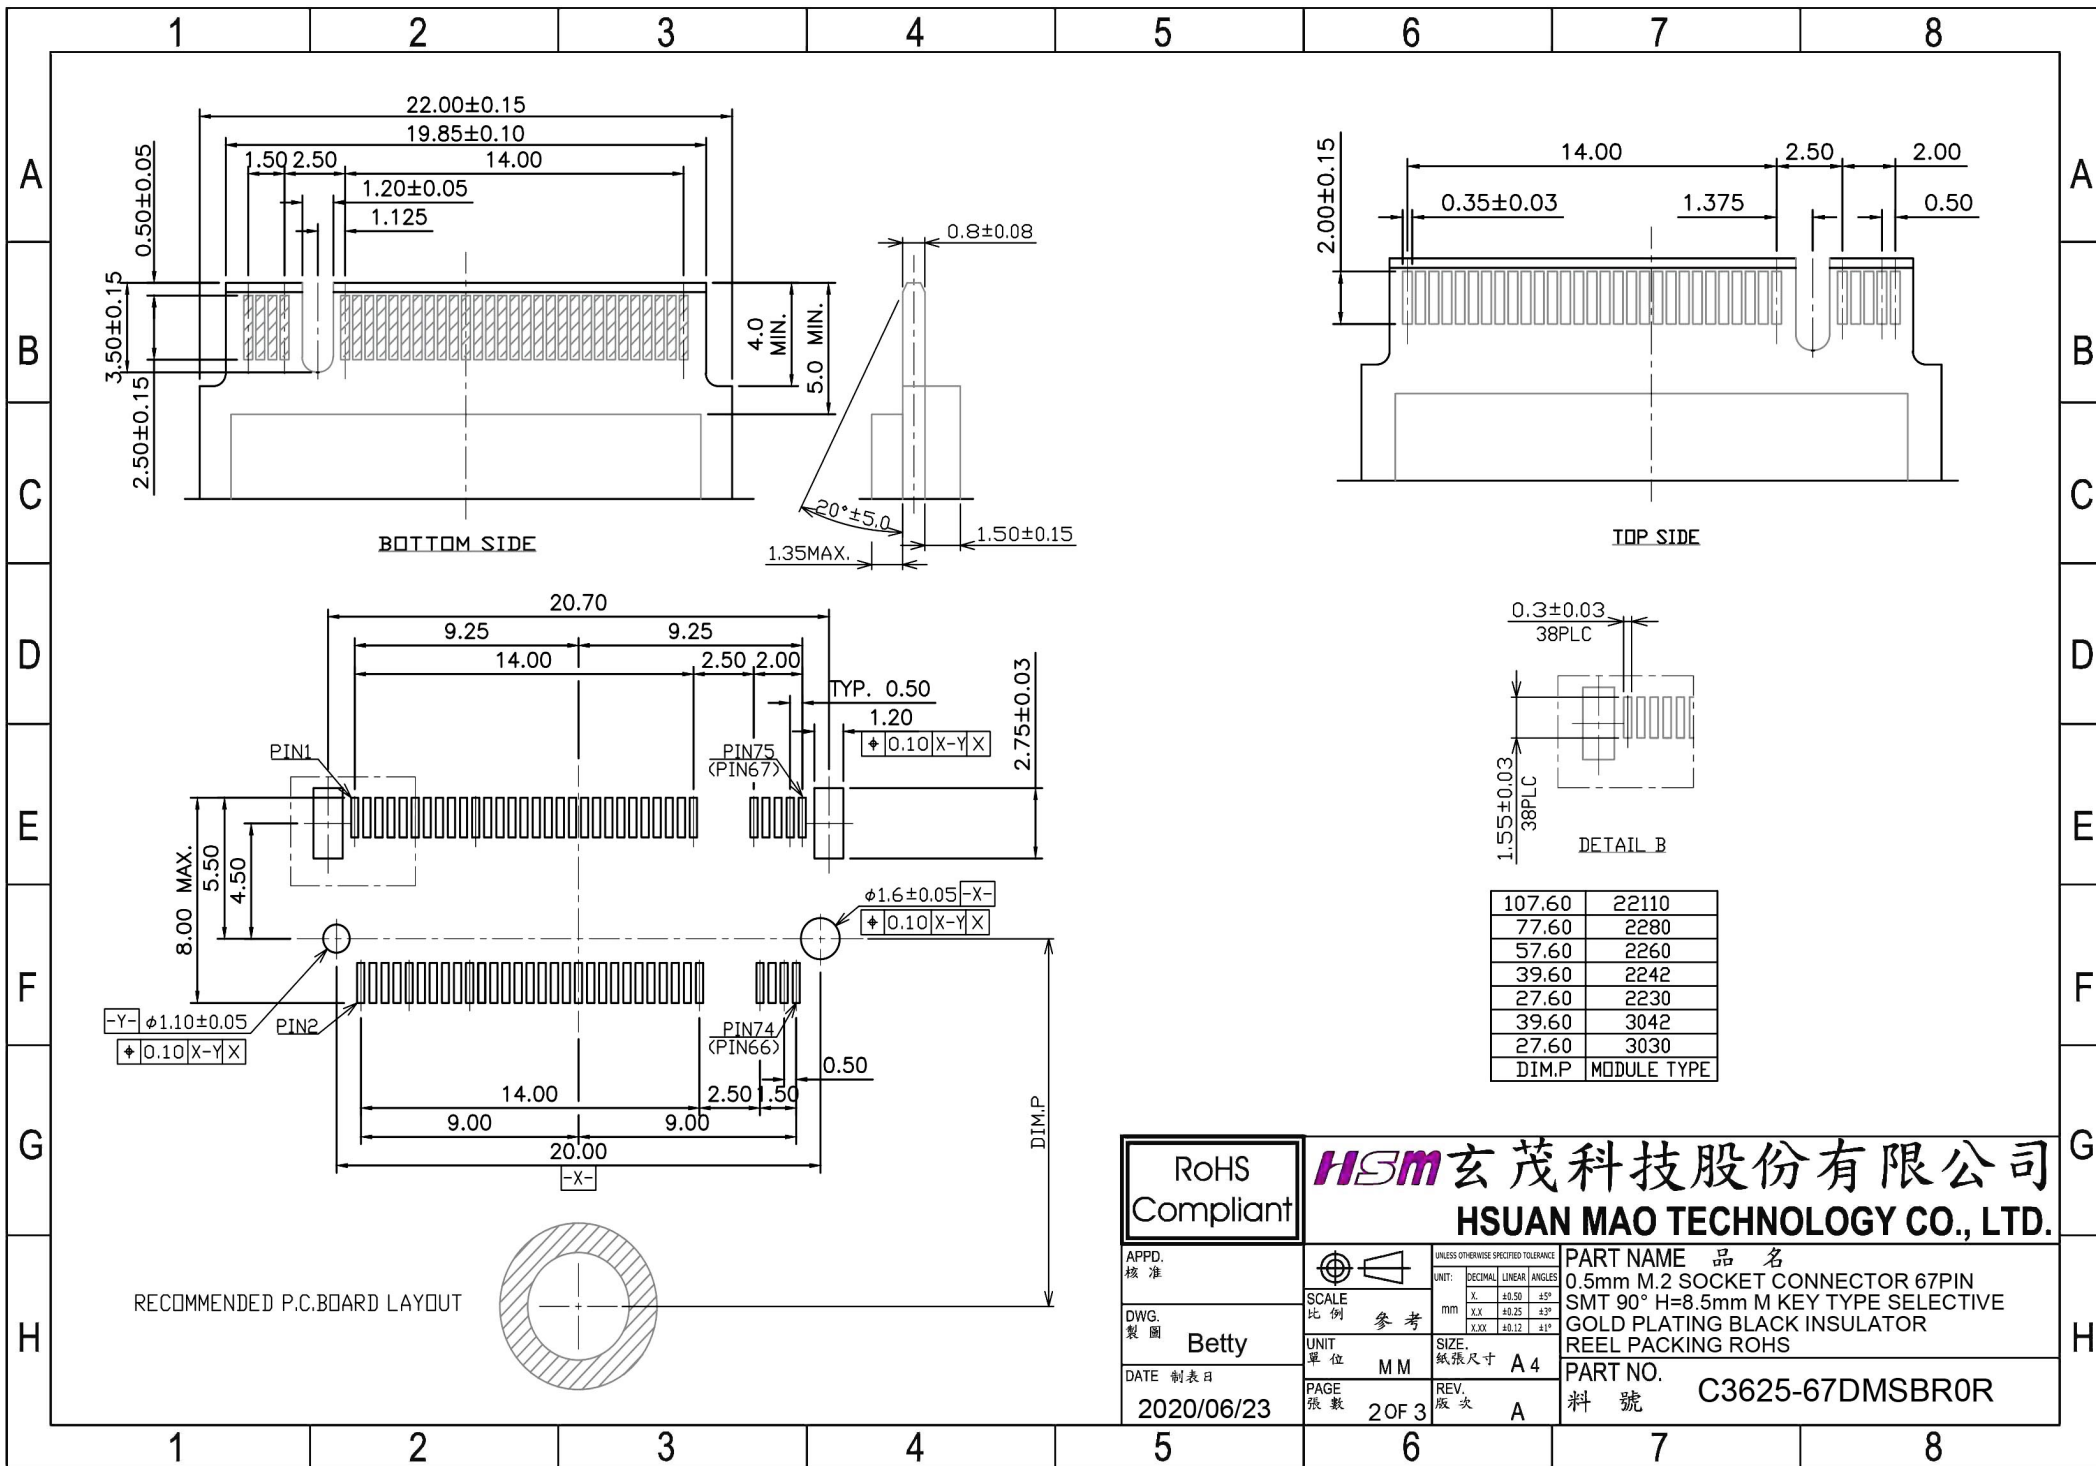


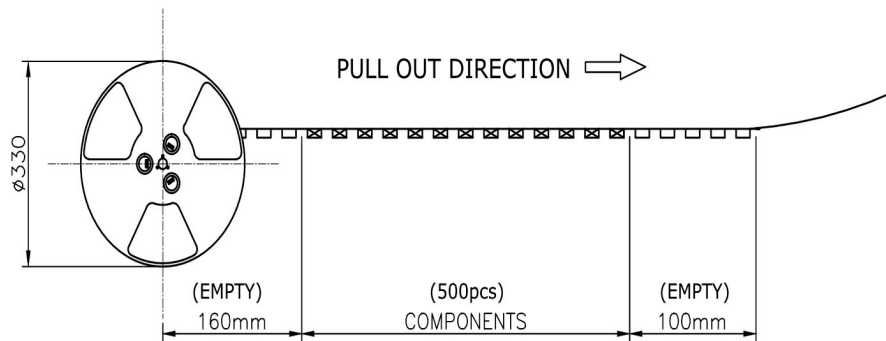

PACKAGING SPECIFICATION:

Quantity:

500 Piece/ Reel
5 Reel/ Carton
2,500 Piece/ Outer Carton

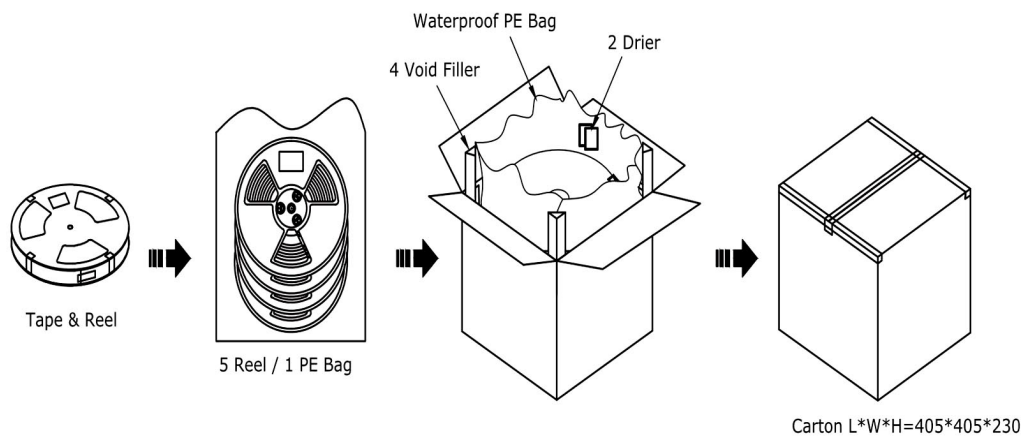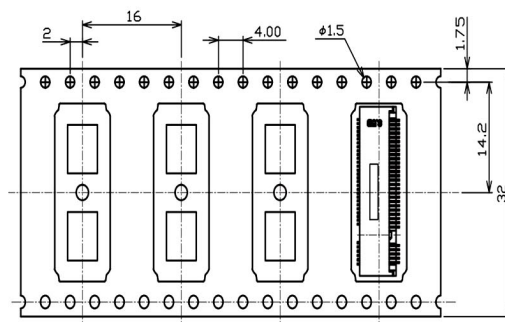

RoHS Compliant		HSM 玄茂科技股份有限公司	
HSM 玄茂科技股份有限公司		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	UNIT: DECIMAL LINEAR ANGLES	PART NAME 品名
DWG. 製圖 Betty	UNIT 單位 MM	mm	0.5mm M.2 SOCKET CONNECTOR 67PIN
DATE 制表日 2020/06/23	PAGE 張數 3 OF 3	SIZE 紙張尺寸 A 4	SMT 90° H=8.5mm M KEY TYPE SELECTIVE
		REV. 版次 A	GOLD PLATING BLACK INSULATOR
			REEL PACKING ROHS
			PART NO. 料號 C3625-67DMSBR0R

1 2 3 4 5 6 7 8

A

B

C






D

E

F

G


H

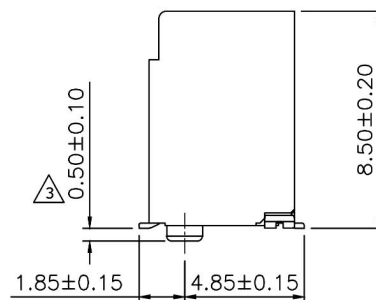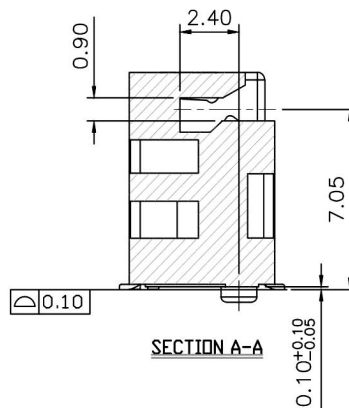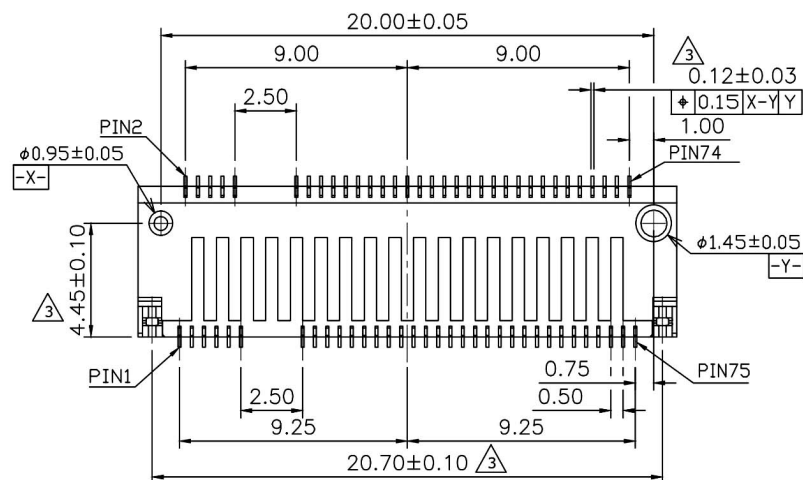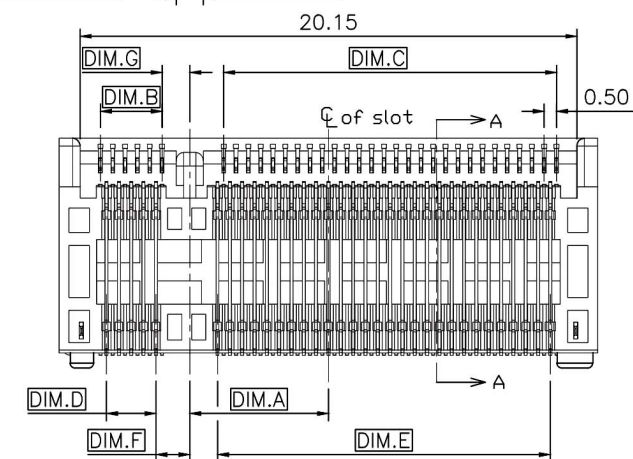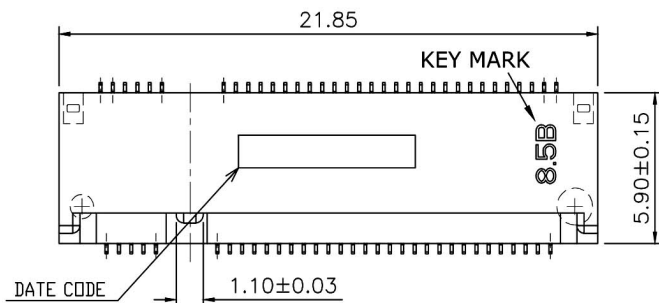

Notes:

Material:

- Housing: High Temperature Thermoplastic, UL94V-0, Black
- Contacts: Copper Alloy, gold plated on contact area and gold flash solder area. 50u" min nickel under-plating overall.
- Peg: Copper Alloy, 50~120u" min matte-tin plated on soldering area. 50u" min. nickel under-plating.
- Reflow Solder Capable to 260°C
- Datecode: YYWWD

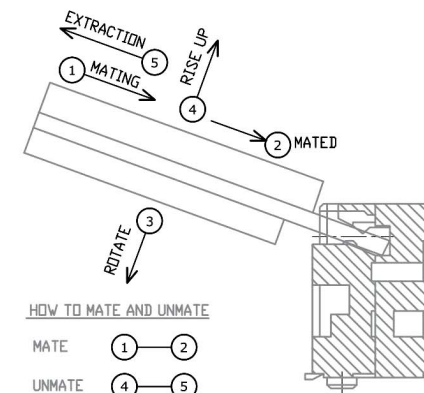

HOW TO MATE AND UNMATE

MATE 1 2
UNMATE 4 5

DIMENSION TABLE							
M	-6.125	14.0	2.0	14.0	1.5	1.125	1.375
Key	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F	DIM.G

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.					
APPD. 核准	SCALE 比例 参考	UNLESS OTHERWISE SPECIFIED TOLERANCE		PART NAME 品名			
DWG. 製圖	UNIT 單位	SIZE 紙張尺寸		0.5mm M.2 SOCKET CONNECTOR 67PIN			
DATE 制表日	PAGE 張數	REV. 版次		SMT 90° H=8.5mm M KEY TYPE SELECTIVE			
2020/06/23	1 OF 3	A		GOLD PLATING BLACK INSULATOR			
				REEL PACKING ROHS			
				PART NO.			
				料號 C3625-67DMSBR0R			

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H