


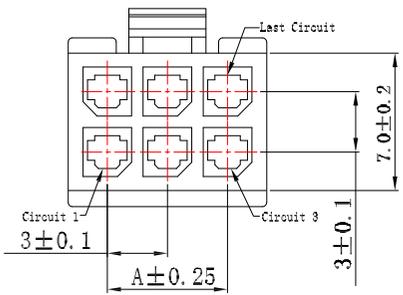
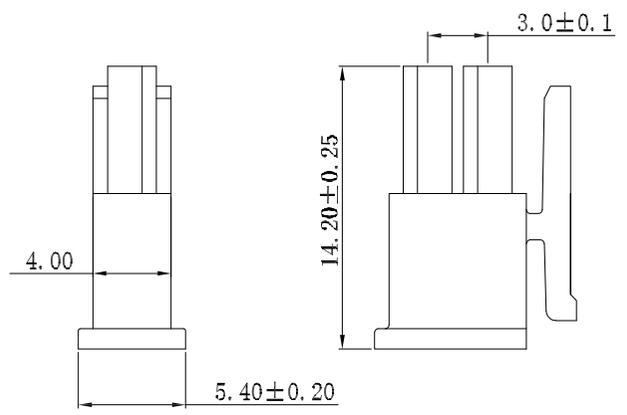


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2022.05.06	钟建虾





SPECIFICATIONS :
Voltage Rating: 250V AC / DC
Current Rating: 5A AC / DC
Withstanding Voltage: 500V AC/minute
Temperature Range: -40°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 10mΩ Max.

Material:
Material: PA66 UL 94V-0
Color:natural color/Black

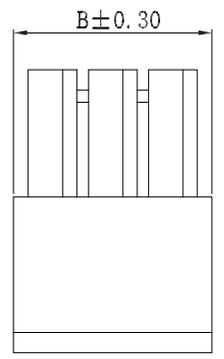

No.of Pin/Row	A	B
01	——	4.00
02	3.00	7.00
03	6.00	10.00
04	9.00	13.00
05	12.00	16.00
06	15.00	19.00
07	18.00	21.90
08	21.00	24.90
09	24.00	28.00
10	27.00	31.00
11	30.00	34.00

2*02~2*11PIN

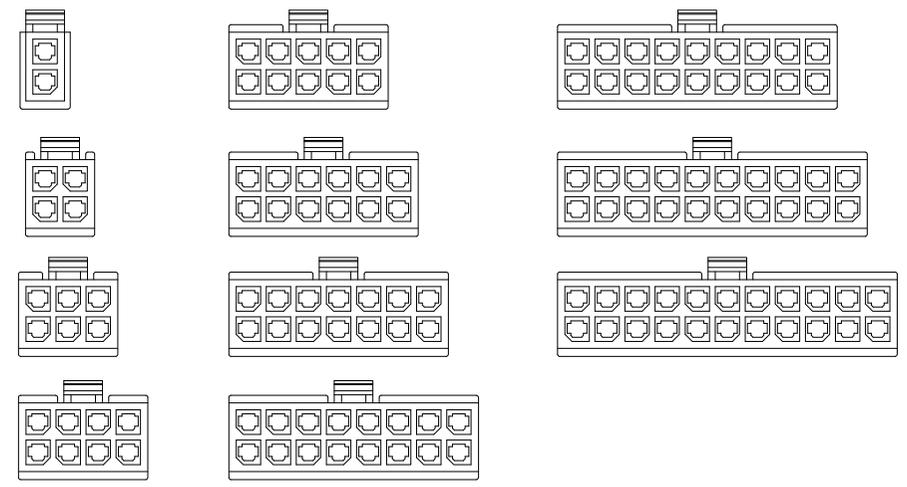

GWZ282 - XX A1 X
No. of Pin/Row 01 ~ 11
Material/Color
M=Nylon66/White
M1=Nylon66/Black

Green conn
Website:www.greenconn.com
E-mail:sales@greenconn.com

3RD.ANG PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X.*±/	X.±0.35
.X*±/	.X±0.30
.XX*±/	.XX±0.25
.XXX*±/	.XXX±0.15

DESIGNED: 钟建虾 DATE: 2022.05.06
CHECKED: DATE:
APPROVED: DATE:

DWG. NO. GWZ282-HA1
PART NO. GWZ282-XXA1X

TITLE. 3.0mm HSG