

1

2

3

4

5



6

7


FOR
客户名称APPROVED
客户确认签字ATTN
销售负责人

A

A

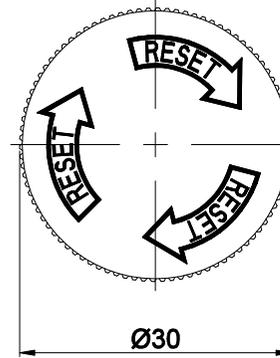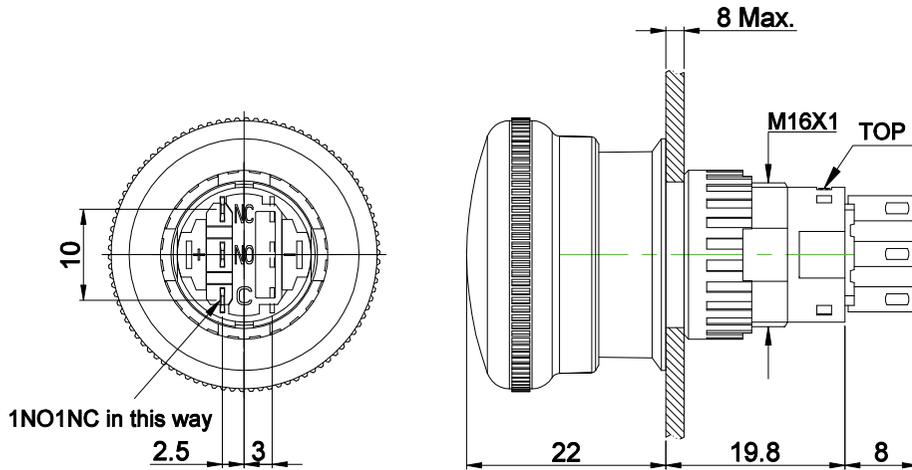


Schematic




B

B



PANEL CUTOUT



Seal Ring

Part Number: LAS1-AY-□TSB/R/◎

"□"	Contact Structure
11	1NO1NC
22	2NO2NC

"◎"	IP Class
No Letter	IP40
P	IP65

C

C

D

D

SPECIFICATIONS:

1. Switch Rating: AC220V/0.5A, DC110V/0.1A.
2. Mechanical Life: $\geq 200,000$ cycles.
3. Electrical Life: $\geq 50,000$ cycles.
4. Contact Resistance: $\leq 50m\Omega$.
5. Insulation Resistance: $\geq 100M\Omega$.
6. Dielectric Strength: 1,500V, RMS 50Hz, 1min.
7. Operating Temperature: $-25^{\circ}C \sim +55^{\circ}C$ (No Freezing).
8. IP Class: IP40, IP65 (made to order).
9. Terminal Type: Pin Terminal (2.8 x 0.5mm).

MATERIALS:

1. Contact: Silver alloy.
2. Button: PC.
3. Body: PC.
4. Base: PA.

BRAND **ONPOW**
品牌 欧宝龙

红波按钮制造有限公司

ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

USED 用途	APPD 审核	CH 2021/11/10
FINISH 处理	CHKD 校对	NCH 2021/11/10
SCALE 比例	UNIT 单位	DR. 制图
1.2 : 1	mm	YDY 2021/11/10

DIMENSIONS	TOLERANCE
0.00 TO 3.00mm	± 0.25 mm
3.01 TO 6.00mm	± 0.30 mm
6.01 TO 10.00mm	± 0.38 mm
10.01 TO 18.00mm	± 0.43 mm
18.01 TO 30.00mm	± 0.52 mm
30.01 TO 50.00mm	± 0.62 mm
50.01 TO 80.00mm	± 0.74 mm

TITLE 名称	LAS1-AY Series Emergency Stop Switch		
DWG NO. 图号	LAS1-AY-TSB		
FILE NAME 档案名称	LAS1-AY-TSB.DWG	SHEET 张	1 / 1
REV. 更改	1	REV. 更改	1

E

E

1

2

3

4

5

6

7