

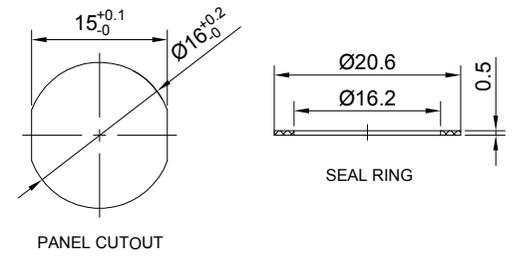


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

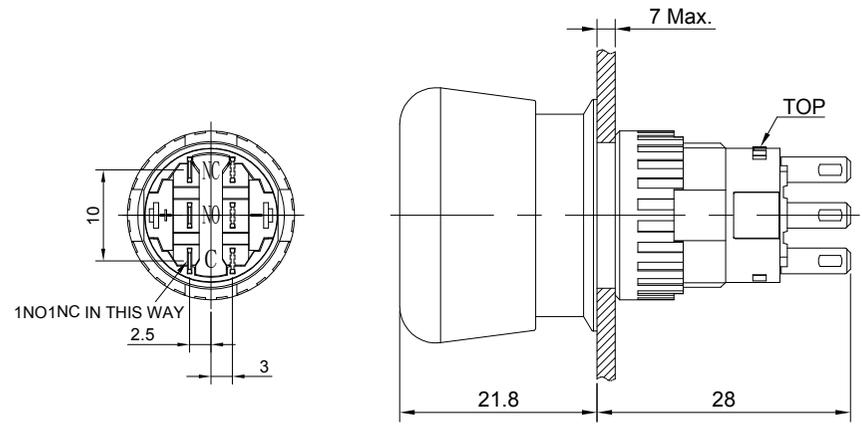

SINGLE-BREAKPOINT QUICK-ACTING CONTACT SWITCHES WITH THREE TERMINALS

PART NUMBER: LAS1-AGQ16-□TSB

" "	CONTACT STRUCTURE
11	1NO1NC
22	2NO2NC

SPECIFICATIONS:

- SWITCH RATING: U_i :250V, I_{th} :5A.
- MECHANICAL LIFE: $\geq 200,000$ cycles.
- ELECTRICAL LIFE: $\geq 50,000$ cycles.
- CONTACT RESISTANCE: $\leq 50m\Omega$.
- INSULATION RESISTANCE: $\geq 100M\Omega(500VDC)$.
- DIELECTRIC STRENGTH: 1,500V, RMS 50Hz, 1min.
- OPERATING TEMPERATURE: $-25^{\circ}C \sim +55^{\circ}C$ (NO FREEZING, KEEP THE AIR FLOWING AROUND PUSHBUTTON).
- OPERATING FORCE: ABOUT 5N(1NO1NC), ABOUT 6.5N(2NO2NC).
- OPERATING TRAVEL: ABOUT 3.1mm.
- TORQUE: 0.6Nm Max. APPLIED TO NUT.
- FRONT FANEL PROTECTION DEGREE: IP65,IK02.
- TERMINAL TYPE: PIN TERMINAL(2.8X0.5mm).
- GENERAL TOLERANCE: 0-18mm= ± 0.25 , 18-80mm= ± 0.52 .

MATERIALS:

- CONTACT: SILVER ALLOY.
- BUTTON: AL ALLOY(RED).
- BODY: AL ALLOY(YELLOW), PC.
- BASE: PBT.

BRAND 品牌		红波按钮制造有限公司			
ONPOW 欧宝龙®		ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
TITLE 名称	LAS1-AGQ16系列抗破坏金属按钮		UNIT 单位	mm	
DWG NO. 图号	LAS1-AGQ16-TSB	SCALE 比例	1.2 : 1	SIZE 图纸	A4
FILE NAME 档案名称	LAS1-AGQ16-TSB .DWG	DRAWN 制图	YDY 2022/07/27	SHEET 张	1/1
		REV. 更改			1