

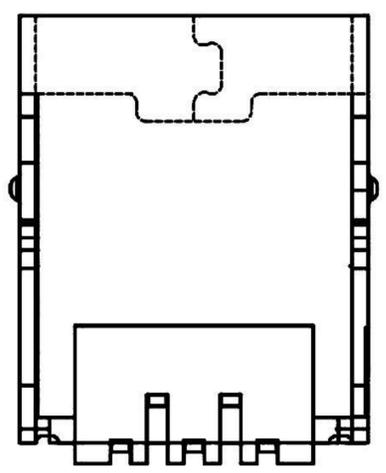
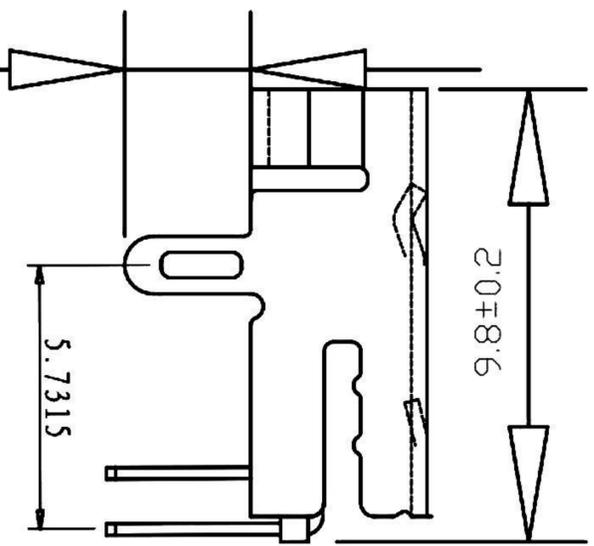
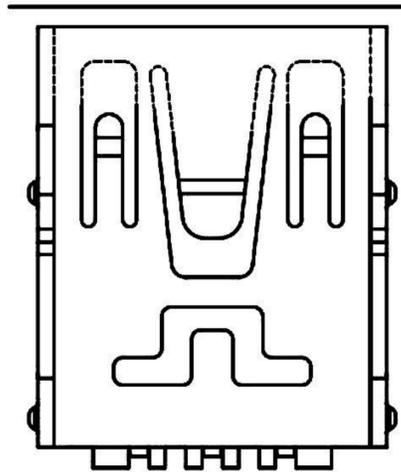


2,75

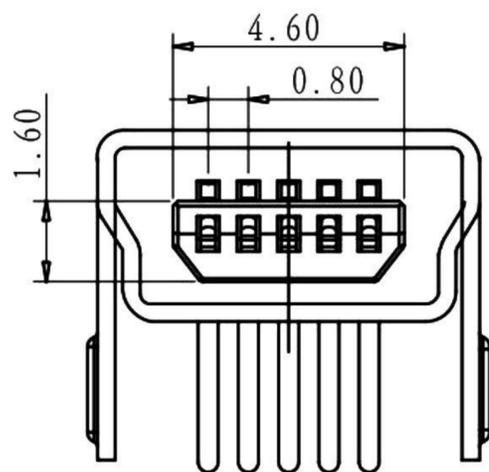

Specifications:
Electrical:
 Contact Resistance 30 milliohms Max
 Dielectric Withstanding Voltage:
 500V AC Sea Level
 Insulation Resistance:
 100 MEGA ohms MIN
Material:
 Housing: High Temperature Thermoplastics.
 LCP
 Contact: Copper Alloy
 Shell: Copper Alloy
Finish:
 Contact: Plated Gold In Mating Area:
 Tin On Slider Talls
 Shell: Nickel/Plating

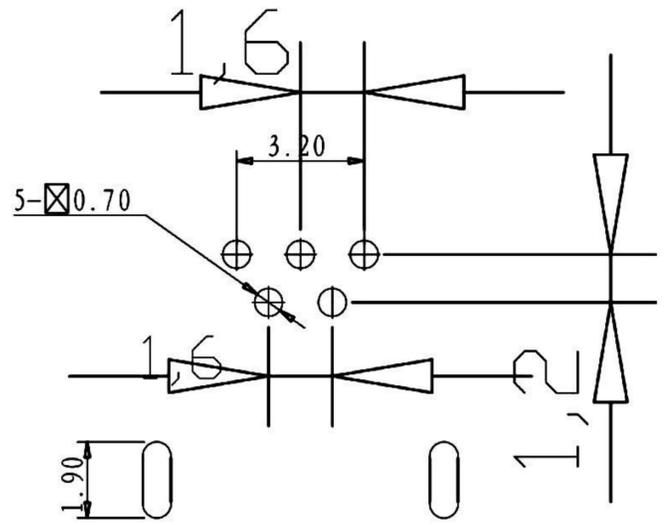

Recommended PCB Layout

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖 Helen		.0 ± 0.30 .00 ± 0.20 ANG. ± 3°	MINI USB 5P FEMALE B TYPE P.C.B. RIGHT ANGLE TYPE BLACK INSULATOR ROHS
DATE 制表日	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號
2013/3/27	PAGE 張數 1 OF 1	REV. 版次 A	C8320-05BFRXB0R