



1 2 3 4 5 6 7

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

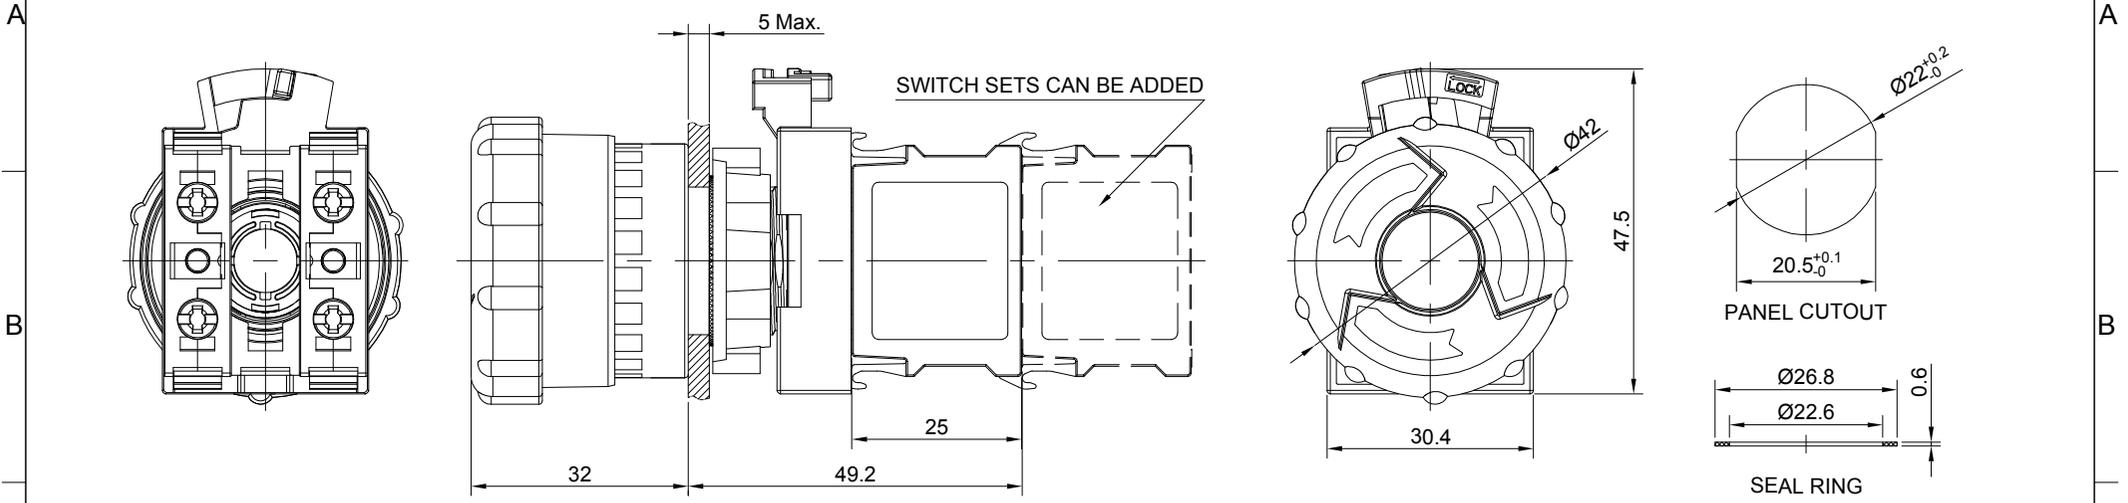

C

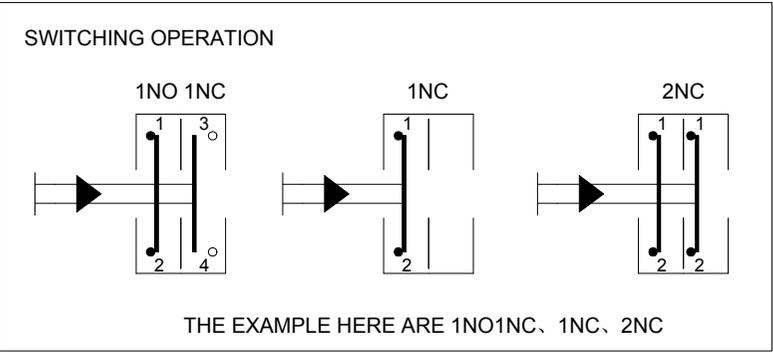

PART NUMBER: ONPOW26-□TSA/※

□	CONTACT STRUCTURE
11	1NO 1NC
01	1NC
02	2NC

THE COMBINATION MODE CAN BE SELECTED ACCORDING TO THE NEEDS.

※	PROTECTION DEGREE
NO LETTER	IP40
P	IP65

- SPECIFICATIONS:**
- SWITCH RATING: Ui:500V, Ith:10A.
 - MECHANICAL LIFE: ≥200,000 cycles.
 - ELECTRICAL LIFE: ≥50,000 cycles.
 - CONTACT RESISTANCE: ≤50mΩ.
 - INSULATION RESISTANCE: ≥100MΩ(500VDC).
 - DIELECTRIC STRENGTH: 3,000V, RMS 50Hz, 1min.
 - OPERATING TEMPERATURE: -25°C~ +55°C(NO FREEZING, KEEP THE AIR FLOWING AROUND PUSHBUTTON).
 - TORQUE: 0.6Nm Max. APPLIED TO NUT.
 - OPERATING FORCE: ABOUT 20N.
 - OPERATING TRAVEL: ABOUT 8mm.
 - FRONT PANEL PROTECTION DEGREE: IP40/IP65.
 - TERMINAL TYPE: THREAD CONNECTION, DIAMETER OF WELDED WIRE: 2 X1.5mm² Max.
 - GENERAL TOLERANCE: 0-18mm=±0.25, 18-80mm=±0.52.
 - RoHS CAN BE CUSTOMIZED.

- MATERIALS:**
- CONTACT: SILVER ALLOY.
 - BUTTON: PA.
 - BODY: PA.
 - BASE: PA.

BRAND 品牌		红波按钮制造有限公司		
ONPOW 欧宝龙®		ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		
TITLE 名称	ONPOW26 SERIES PUSHBUTTON SWITCHES	UNIT 单位	mm	
DWG NO. 图号	ONPOW26-TSA(不带灯)	SCALE 比例	0.9 : 1	SIZE 图纸 A4
FILE NAME 档案名称	ONPOW26-TSA .DWG	DRAWN 制图	HCP 2024/02/28	SHEET 张 1/1 REV. 更改 1

D

E

1 2 3 4 5 6 7