



FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

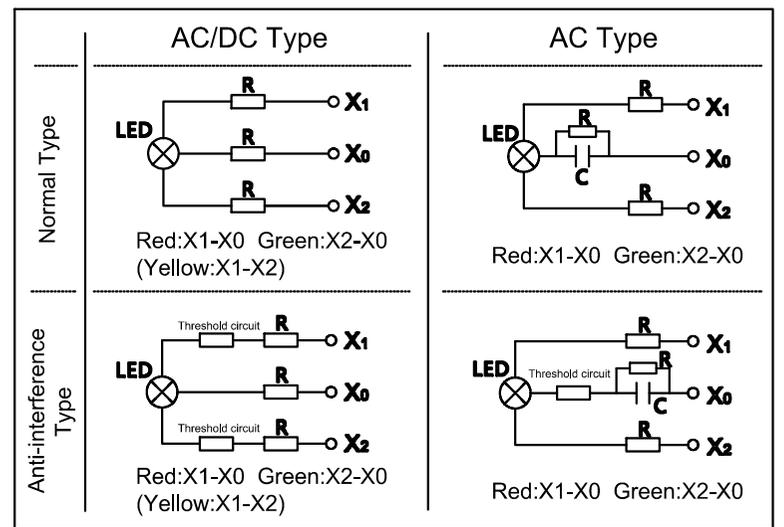

Part Number: AD16-22D/△△/▲/●/◎



Seal Ring

"△"	Lamp Color
R	Red (X1)
G	Green (X2)
Other Color can be made to order	

"△"	Lamp Color
R	Red (X1)
G	Green (X2)
Other Color can be made to order	

"▲"	Lamp voltage	"▲"	Lamp voltage
6V	AC/DC 6V	220VDC	AC/DC 220V
12V	AC/DC 12V	380VDC	AC/DC 380V
24V	AC/DC 24V	110V	AC 110V
48V	AC/DC 48V	220V	AC 220V
110VDC	AC/DC 110V	380V	AC 380V
Other voltage can be made to order			

"●"		"◎"	IP class
No Letter	normal type	No Letter	IP40
K	anti-interference type	P	IP65

SPECIFICATIONS:

1. Electrical Life: ≥40,000 hours.
2. Permitted Voltage ±20%(≥110V).
3. Dielectric Strength: 2.5KV(AC RMS), 1min.
4. Usage Frequency(AC): 50~60 Hz.
5. Rated Operating Current: ≤20mA.
6. Brightness: ≥100cd/m².
7. Comparative Tracking Index CT1≥100, flame retardant.
8. Insulation Resistance: Ui≤60V, 5MΩ, 60V<Ui≤660V, 50MΩ.
9. IP Class: IP40/IP65.
10. AC/DC type pilot lamp is resistor step-down form;
AC type pilot lamp is capacitor step-down form.

MATERIALS:

1. Head: PS.
2. Body: PA.
3. Base: PA.

BRAND 品牌 ONPOW	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		
	USED 用途	APPD 审核	CH 2020/04/09
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	FINISH 处理	CHKD 校对	NCH 2020/04/09
	SCALE 比例 1.2 / 1	UNIT 单位 mm	DR. 制图 ZPD 2020/04/09
DIMENSIONS	TOLERANCE	TITLE 名称	AD16 Pilot lamp
0.00 TO 18.00mm	±0.43mm	DWG NO. 图号	AD16-22D双色
18.01 TO 30.00mm	±0.52mm	FILE NAME 档案名称	AD16-22D.DWG
30.01 TO 50.00mm	±0.62mm	SHEET 张	1 / 1
50.01 TO 80.00mm	±0.74mm	REV. 更改	1

E

E