

Module Length (mm)
42
60
80
110


KEY ID "A"

RECOMMENDED MODULE LAYOUT

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		
	APPD. 核准 Betty		DECIMAL LINEAR ANGLES X. ± 0.50 $\pm 5^\circ$ X.X ± 0.25 $\pm 3^\circ$ X.XX ± 0.12 $\pm 1^\circ$
DWG. 製圖 Betty	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C3625-67AASBR0R
DATE 制表日 2024/04/23	PAGE 張數 2 OF 3	REV. 版次 A	

1 2 3 4 5 6 7 8

A

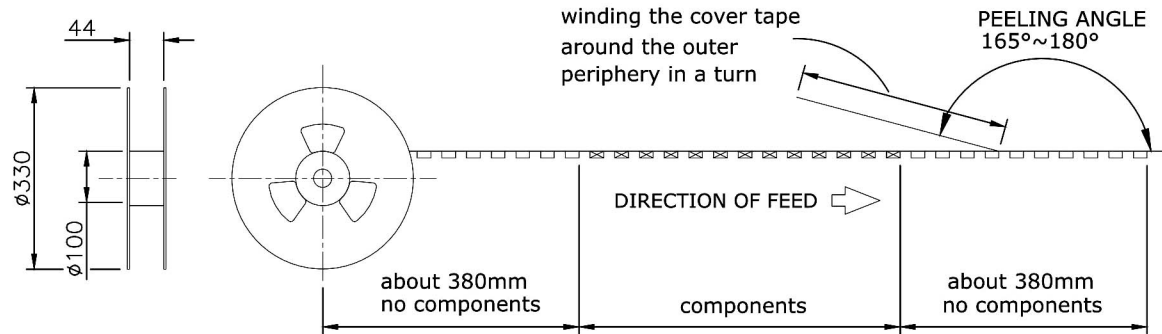

PACKAGING SPECIFICATION:

1. MATERIAL
 - 1.1 Embossed Carrier Tape: PS Black
 - 1.2 Top Cover Tape: PET 20-80g(Peel Speed 300mm/Minute)
 - 1.3 Taping Reel: Plastic


2. Packaging:

Height	Reel	Carton
3.05	900	5400

B

C


D

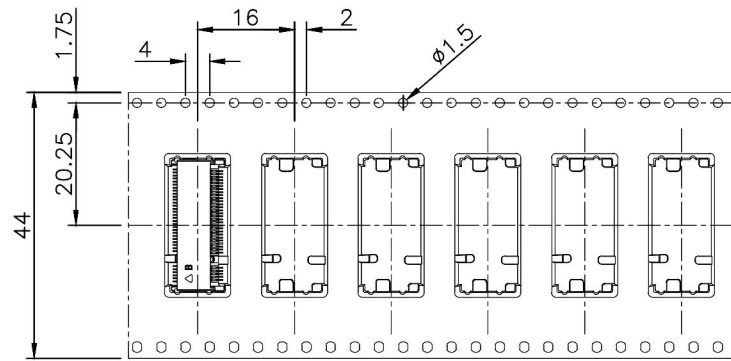

E

F

G

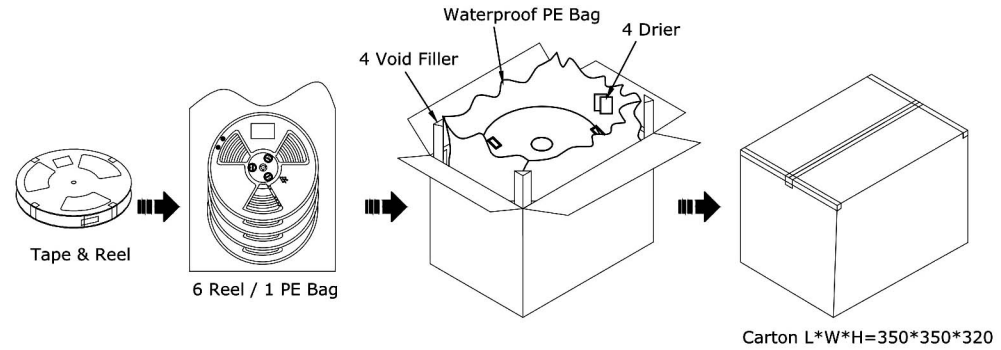

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>														
<p>APPD. 核准</p>		<table border="1"> <tr> <th>DECIMAL</th> <th>LINEAR</th> <th>ANGLES</th> </tr> <tr> <td>X.</td> <td>±0.50</td> <td>±5°</td> </tr> <tr> <td>X.X</td> <td>±0.25</td> <td>±3°</td> </tr> <tr> <td>X.XX</td> <td>±0.12</td> <td>±1°</td> </tr> </table>	DECIMAL	LINEAR	ANGLES	X.	±0.50	±5°	X.X	±0.25	±3°	X.XX	±0.12	±1°	<p>PART NAME 品名 0.5mm M.2 SOCKET CONNECTOR67PIN SMT 90° H=3.0mm A KEY TYPE SELECTIVE GOLD PLATING BLACK INSULATOR REEL PACKING ROHS</p>	
DECIMAL	LINEAR	ANGLES														
X.	±0.50	±5°														
X.X	±0.25	±3°														
X.XX	±0.12	±1°														
<p>DWG. 製圖</p>	<p>Betty</p>	<p>SCALE 比例 參考</p>	<p>UNIT 單位</p>	<p>SIZE. 紙張尺寸</p>												
<p>DATE 制表日</p>	<p>2024/04/23</p>	<p>PAGE 張數</p>	<p>3 OF 3</p>	<p>REV. 版次</p>												
		<p>A</p>	<p>PART NO. 料號 C3625-67AASBR0R</p>													

1 2 3 4 5 6 7 8

H

A

B

C

D

E

F

G

H