

SPECIFICATION:


1. ELECTRICAL
 - 1.1 Current Rating: 0.5A per pin
 - 1.2 Voltage Rating: 50V AC
 - 1.3 Contact Resistance: 55mΩ Max
 - 1.4 Insulation Resistance: 500MΩ Min
 - 1.5 Dielectric Withstanding Voltage: 300VAC
2. MECHANICAL
 - 2.1 Durability: 50 Cycles
 - 2.2 Total Mating/Unmating Force: 2.3Kgf max.
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -40°C~+85°C
 - 3.2 Storage temperature range: -40°C~+85°C
4. SOLDER ABILITY
 - 4.1 Recommended IR-Reflow Temperature: 260°C 10Sec

Date Code: Y WW D

Year Day(1~7)
 Week(1~52)


3	HOLDDOWN	Brass, Tin plated under nickel plating
		Phosphor Bronze, contact area: G/F
2	CONTACT	solder area: Tin, under plating Nickel
1	HOUSING	LCP UL94V-0, Black
NO.	PART NAME	DESCRIPTION

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 Betty	TOLERANCE DECIMAL LINEAR ANGLES X. ±0.50 ±5° X.X ±0.25 ±3° X.XX ±0.12 ±1° SCALE 比例 参考 UNIT 單位 M M PAGE 張數 1 OF 4 DATE 制表日 2020/12/25 REV. 版次 A
PART NAME 品名 0.8MM MINI PCI EXPRESS SOCKET 52PIN SMT TYPE H=4.0MM SELECTIVE GOLD PLATING BLACK COLOR REEL PACKING ROHS PART NO. 料號 C3619-52ASBR01R		

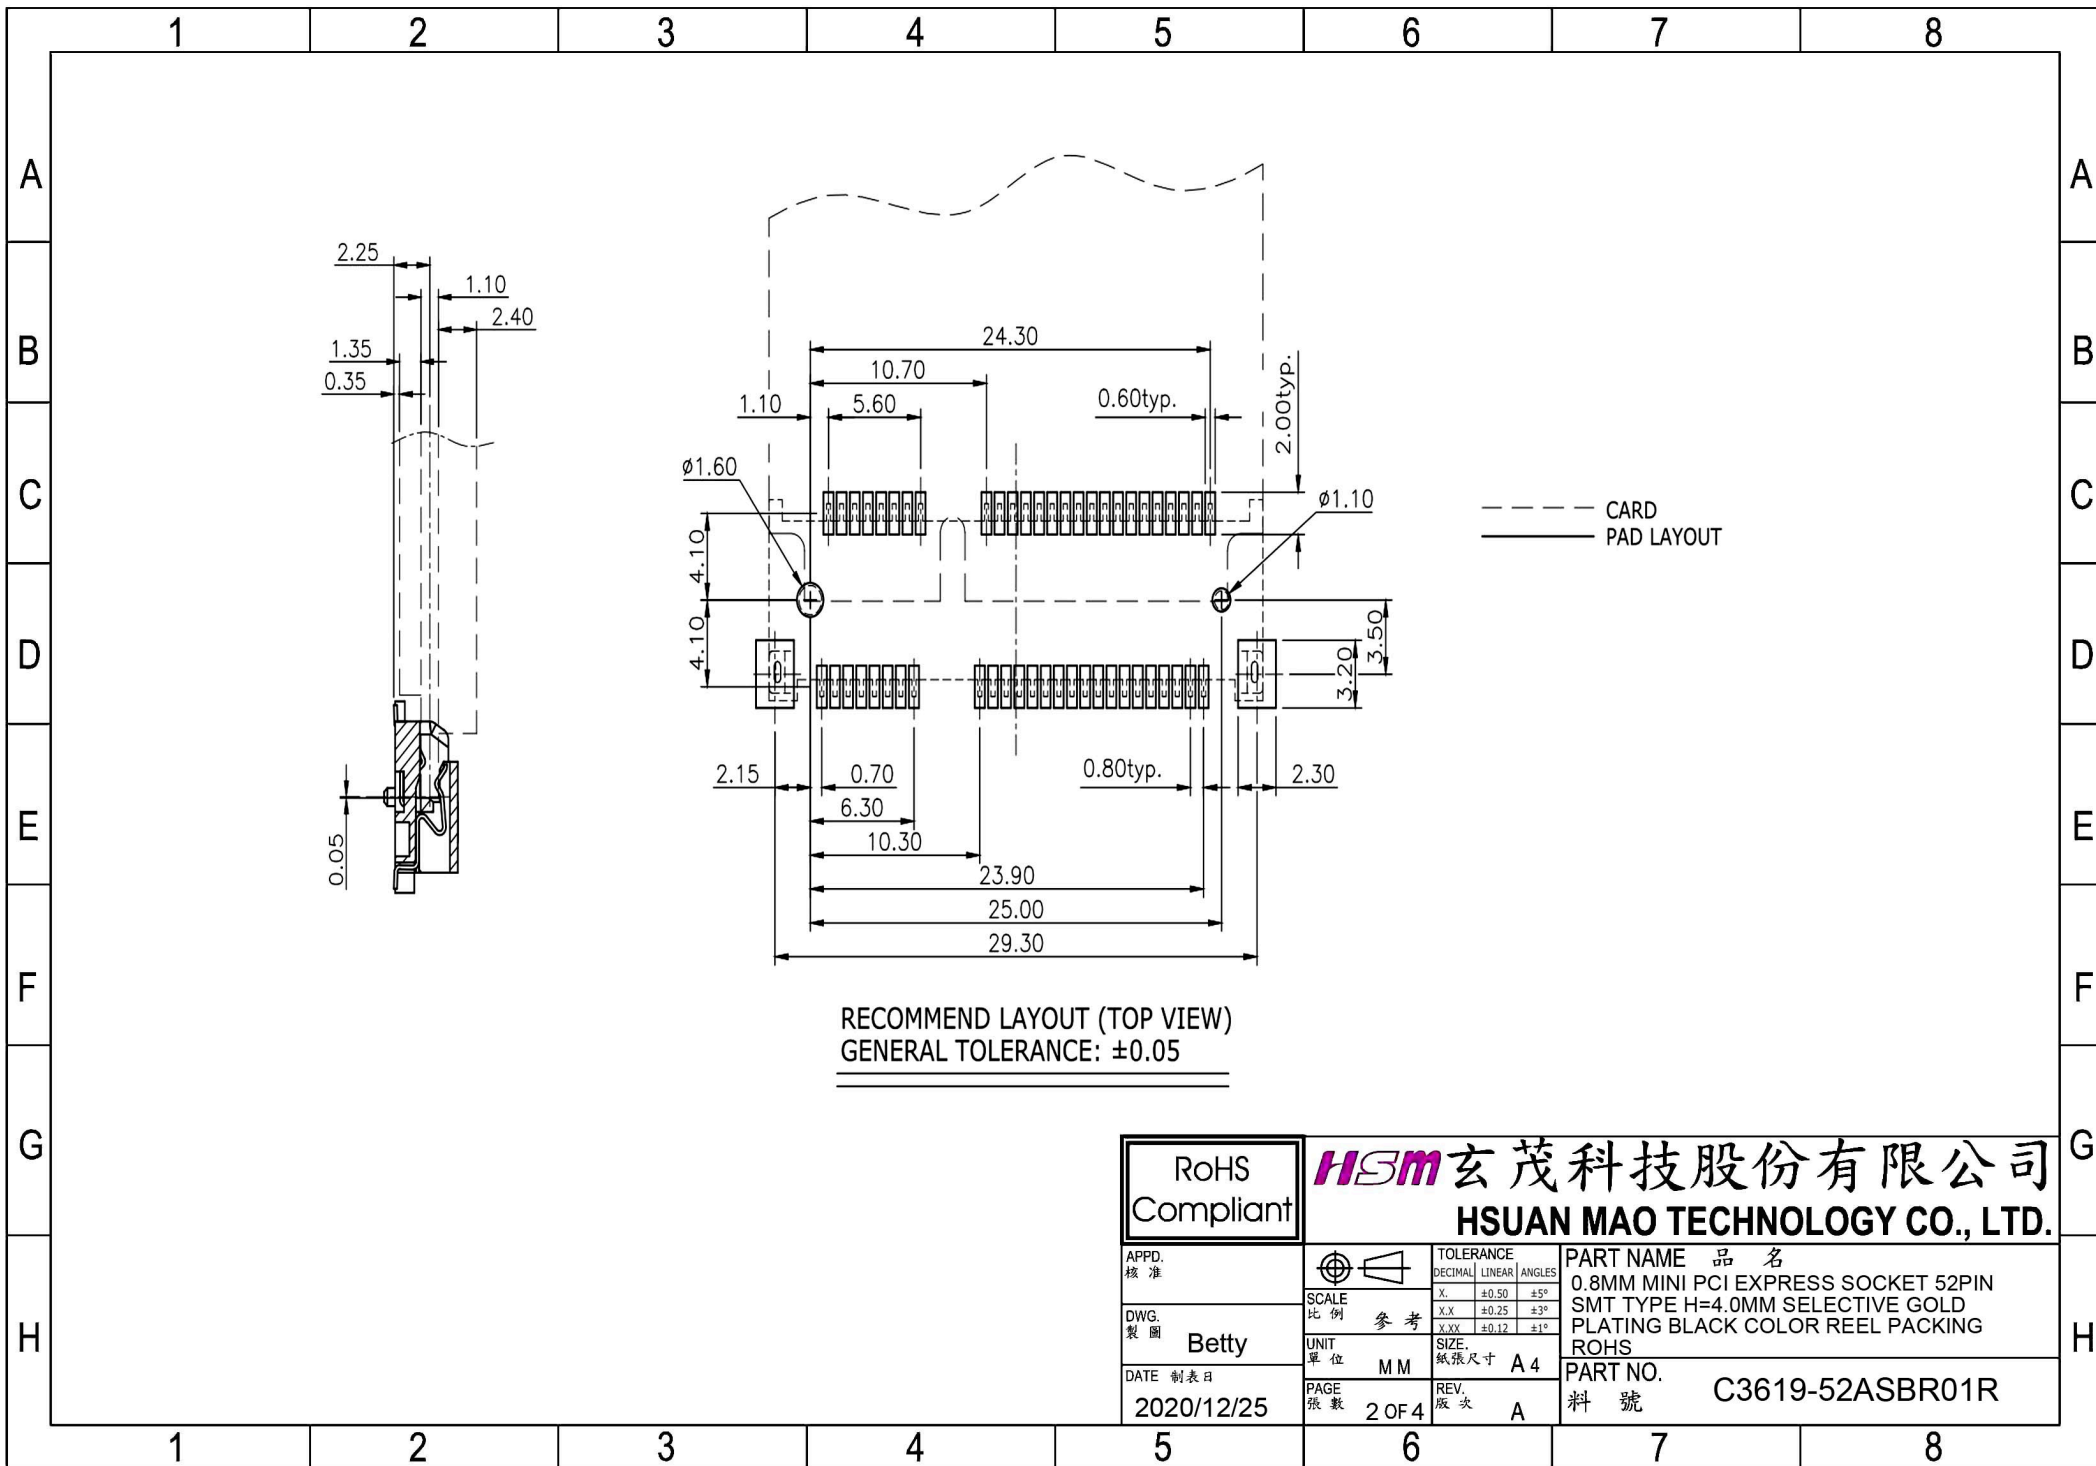

RECOMMEND LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.05

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE DECIMAL LINEAR ANGLES	PART NAME 品名 0.8MM MINI PCI EXPRESS SOCKET 52PIN SMT TYPE H=4.0MM SELECTIVE GOLD PLATING BLACK COLOR REEL PACKING ROHS
DWG. 製圖 Betty		SCALE 比例 參考	X. ±0.50 ±5° X.X ±0.25 ±3° X.XX ±0.12 ±1°
DATE 制表日 2020/12/25	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	PART NO. 料號 C3619-52ASBR01R
	PAGE 張數 2 OF 4	REV. 版次 A	

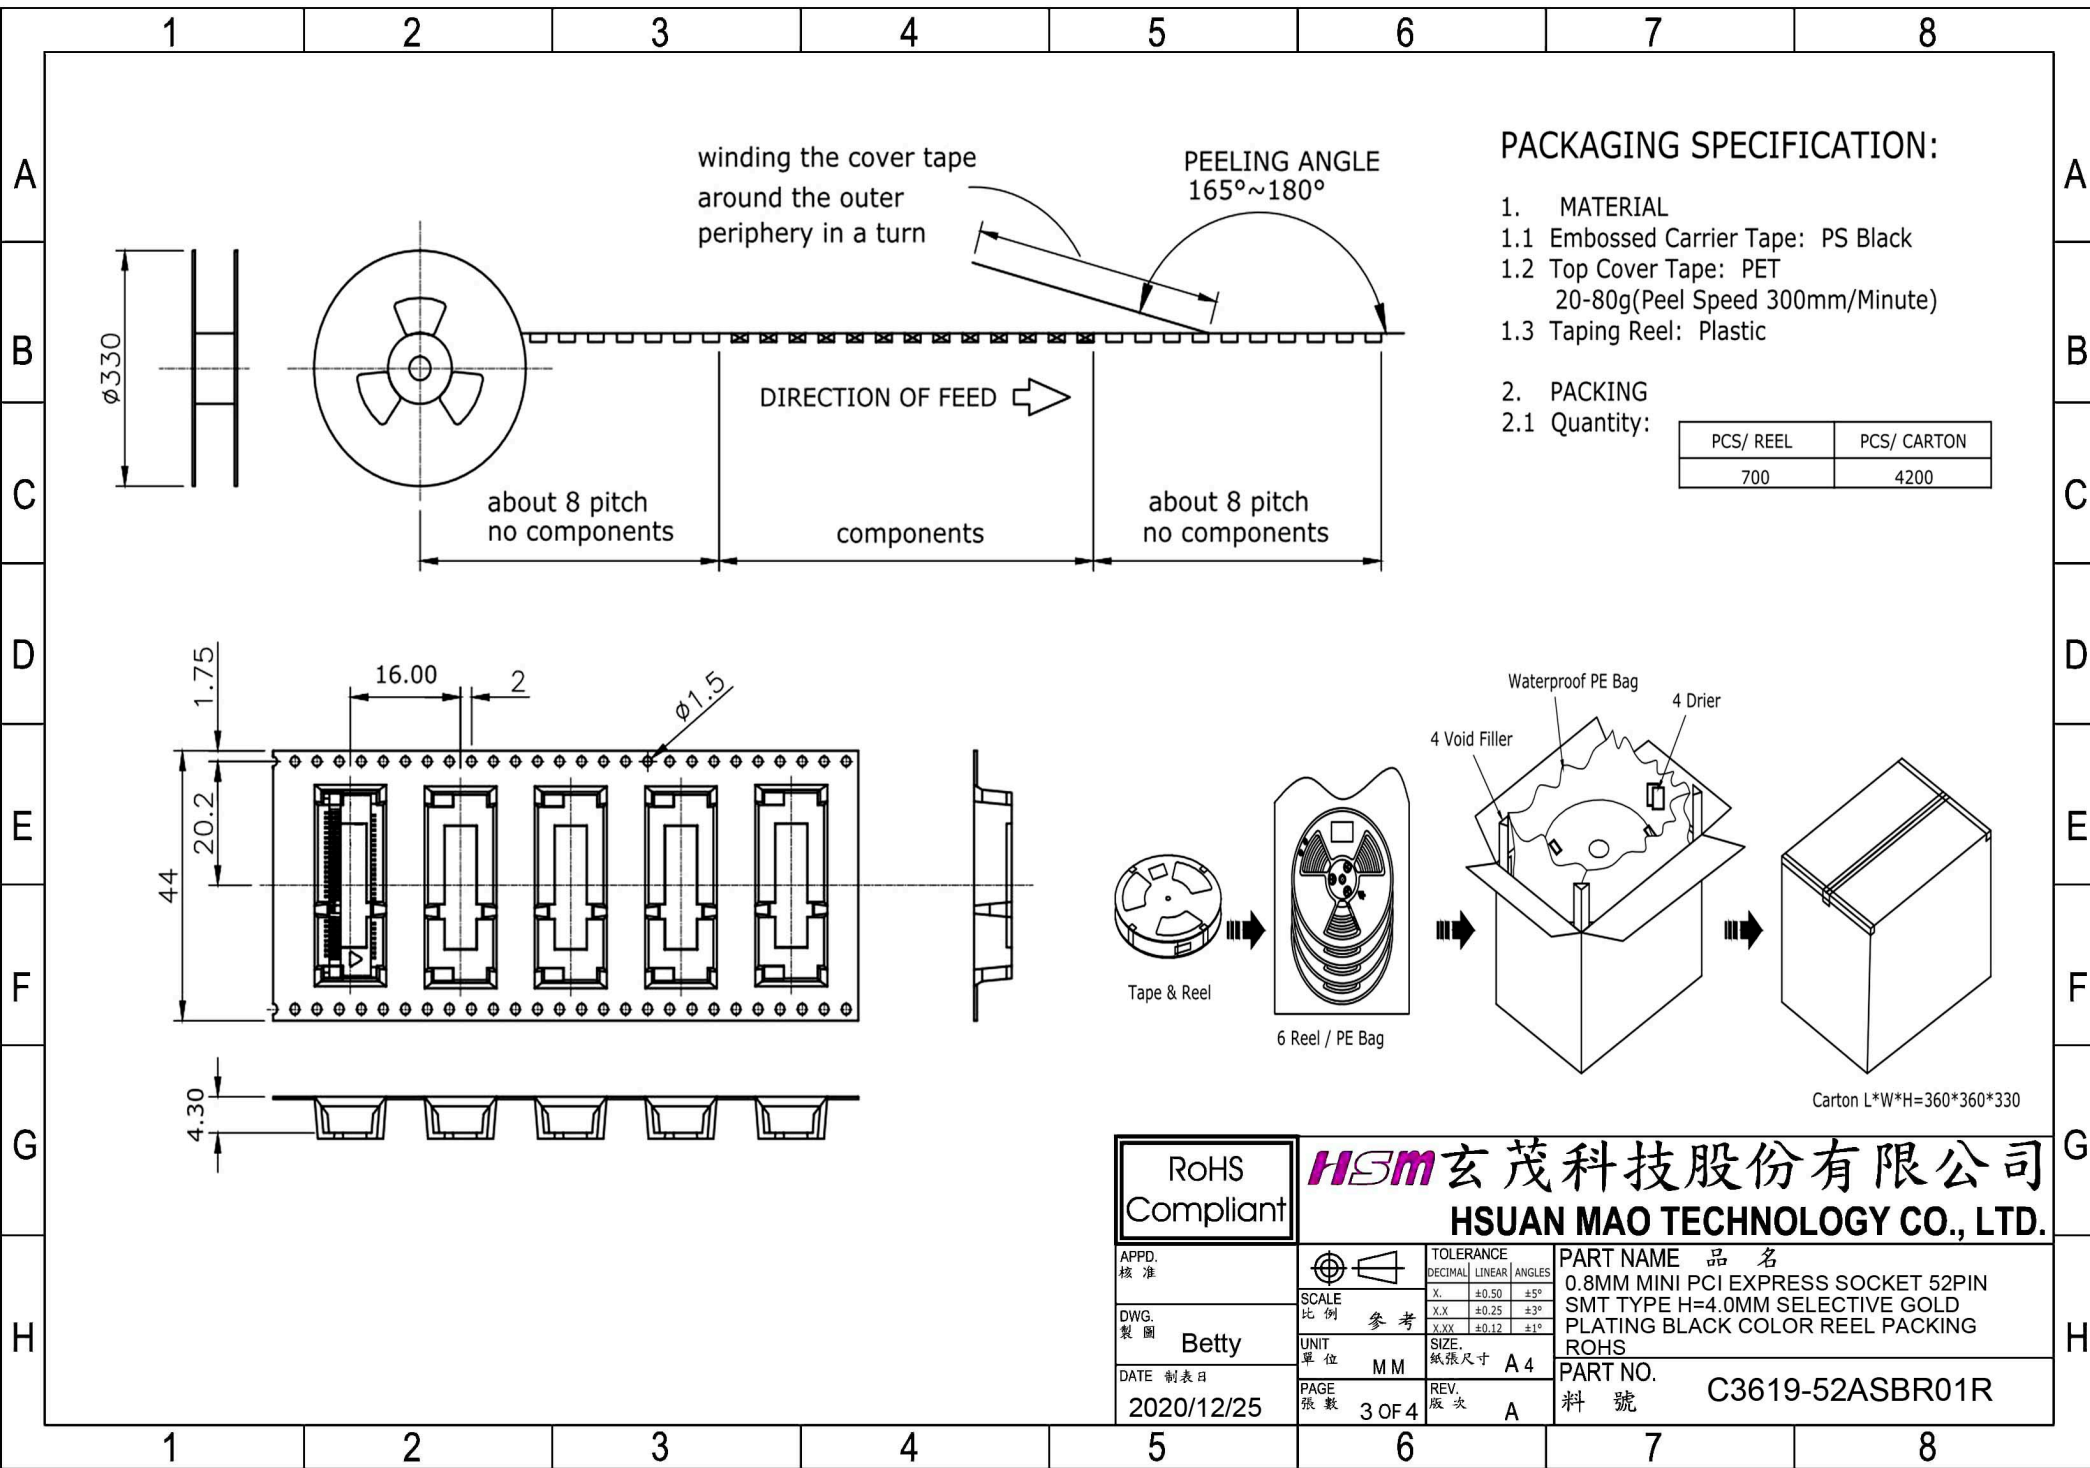

PACKAGING SPECIFICATION:

- 1. MATERIAL
 - 1.1 Embossed Carrier Tape: PS Black
 - 1.2 Top Cover Tape: PET
20-80g(Peel Speed 300mm/Minute)
 - 1.3 Taping Reel: Plastic

- 2. PACKING
 - 2.1 Quantity:

PCS/ REEL	PCS/ CARTON
700	4200



RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
Betty
DATE 制表日
2020/12/25

SCALE 比例 参考	TOLERANCE	DECIMAL	LINEAR	ANGLES
	X.	±0.50		±5°
UNIT 單位 M M	X.X	±0.25		±3°
	X.XX	±0.12		±1°
PAGE 張數 3 OF 4	SIZE. 紙張尺寸	A 4		
	REV. 版次	A		

PART NAME 品名
0.8MM MINI PCI EXPRESS SOCKET 52PIN
SMT TYPE H=4.0MM SELECTIVE GOLD
PLATING BLACK COLOR REEL PACKING
ROHS
PART NO.
料號 C3619-52ASBR01R

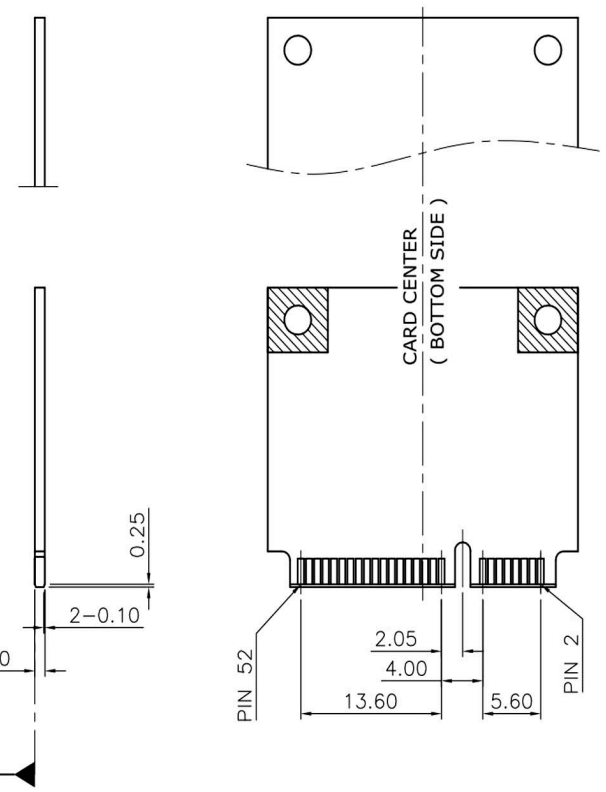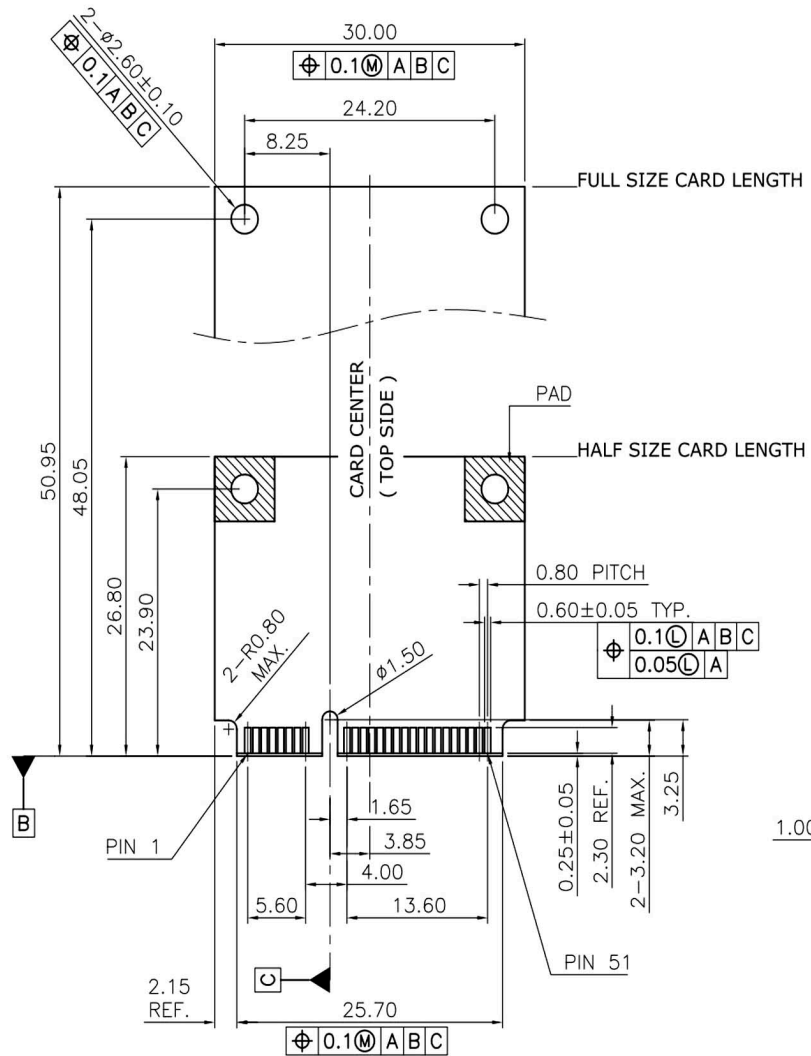

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.																						
APPD. 核准 DWG. 製圖 DATE 製表日 2020/12/25	Betty 2020/12/25	<table border="1"> <tr> <th rowspan="2">SCALE 比例</th> <th colspan="2">TOLERANCE</th> <th rowspan="2">PART NAME 品名</th> </tr> <tr> <th>DECIMAL</th> <th>LINEAR</th> <th>ANGLES</th> </tr> <tr> <td>參考</td> <td>X. ±0.50</td> <td>±5°</td> <td rowspan="3"> 0.8MM MINI PCI EXPRESS SOCKET 52PIN SMT TYPE H=4.0MM SELECTIVE GOLD PLATING BLACK COLOR REEL PACKING ROHS </td> </tr> <tr> <td>單位</td> <td>X.X ±0.25</td> <td>±3°</td> </tr> <tr> <td>MM</td> <td>X.XX ±0.12</td> <td>±1°</td> </tr> <tr> <td>PAGE 張數</td> <td>4 OF 4</td> <td>REV. 版次</td> <td>A</td> </tr> </table>	SCALE 比例	TOLERANCE		PART NAME 品名	DECIMAL	LINEAR	ANGLES	參考	X. ±0.50	±5°	0.8MM MINI PCI EXPRESS SOCKET 52PIN SMT TYPE H=4.0MM SELECTIVE GOLD PLATING BLACK COLOR REEL PACKING ROHS	單位	X.X ±0.25	±3°	MM	X.XX ±0.12	±1°	PAGE 張數	4 OF 4	REV. 版次	A	PART NO. C3619-52ASBR01R 料號
SCALE 比例	TOLERANCE			PART NAME 品名																				
	DECIMAL	LINEAR	ANGLES																					
參考	X. ±0.50	±5°	0.8MM MINI PCI EXPRESS SOCKET 52PIN SMT TYPE H=4.0MM SELECTIVE GOLD PLATING BLACK COLOR REEL PACKING ROHS																					
單位	X.X ±0.25	±3°																						
MM	X.XX ±0.12	±1°																						
PAGE 張數	4 OF 4	REV. 版次	A																					