

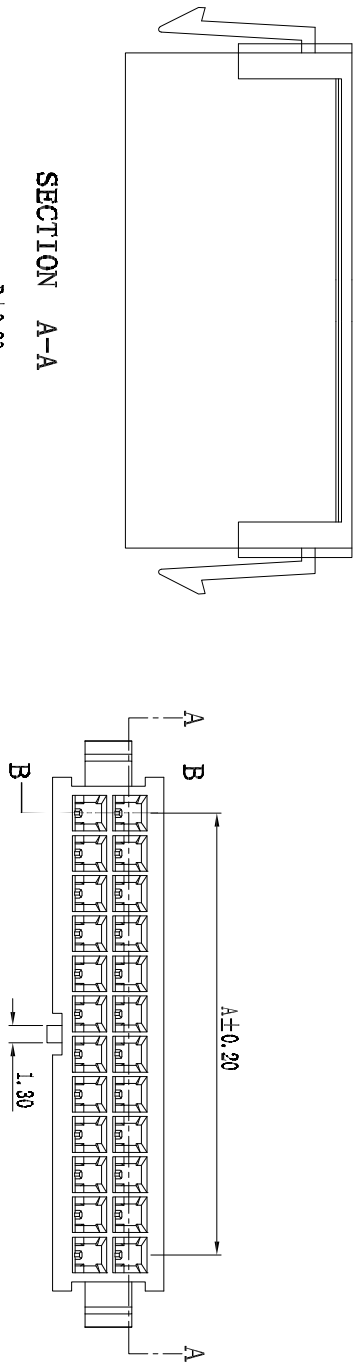


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2022.01.13	罗嘉乐

Specifications
 Current Rating:5AMP
 Voltage Rating:250V.AC DC
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:1000VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40C to +85°C
 Materials
 Insulator Material:UL 94V-0 PA66
 Packing specifications:
 2*1~2*06P 2,000 pcs/bag
 2*07P以上 1,000 pcs/bag
 Mating With:
 Terminal: GTZ1E5-T1
 All materials must meet GREENCONN
 hazardous substances control standards.

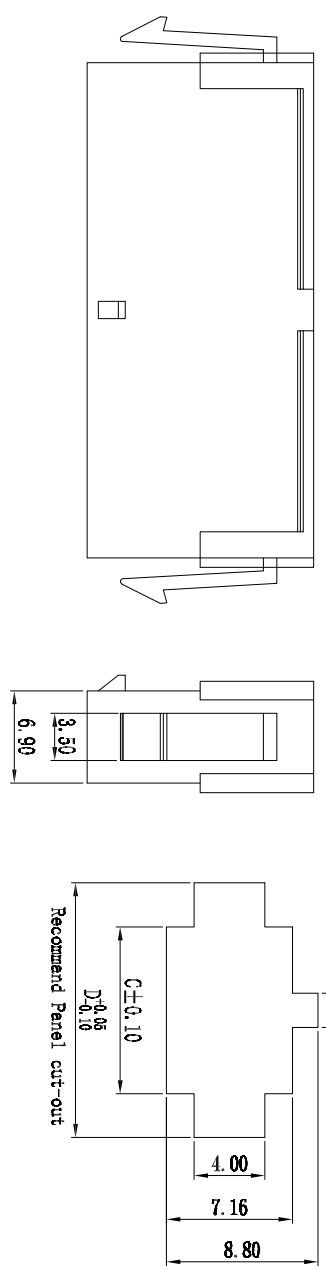

No. of Pins/Row	Dimension Information			
	A	B	C	D
2*01	---	4.0	4.36	8.0
2*02	3.00	7.0	7.36	11.0
2*03	6.00	10.0	10.36	14.0
2*04	9.00	13.0	13.36	17.0
2*05	12.00	16.0	16.36	20.0
2*06	15.00	19.0	19.36	23.0
2*07	18.00	22.0	22.36	26.0
2*08	21.00	25.0	25.36	29.0
2*09	24.00	28.0	28.36	32.0
2*10	27.00	31.0	31.36	35.0
2*11	30.00	34.0	34.36	38.0
2*12	33.00	37.0	37.36	41.0

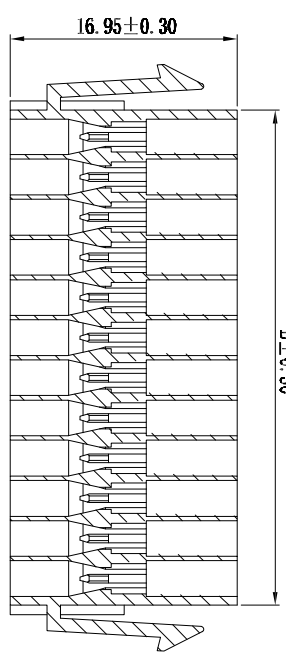

Ordering Information

GWZ362 - XX A X
 No. of Pin/Row 01~12
 Material/Color P1=NYLON66/White M1=NYLON66/Black

 Website: www.greenconn.com E-mail: sales@greenconn.com	3RD ANG PROJ.	GENERAL TOLERANCE		DESIGNED: 罗嘉乐	DATE: 2022.01.13	DWG. NO.	TITLE.
	 Website: www.greenconn.com E-mail: sales@greenconn.com	 Website: www.greenconn.com E-mail: sales@greenconn.com	X.±5.0° X.±3.0° .XX'±2.0° .XXX±1.0°	X.±0.35 .X±0.30 .XX±0.20 .XXX±0.10	CHECKED:	DATE:	
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	APPROVED:	DATE:	PART NO.	3.00mm Pitch Housing
						GWZ362 - XX A XX	